



KROWNE[®]

Where **passion** meets **precision**.[®]

THE ULTIMATE GAS CONNECTOR GUIDE



Krowne
100 Haul Rd.
Wayne, NJ 07470

krowne.com



THE ULTIMATE GAS CONNECTOR

Krowne's movable gas connector is a stainless steel gas hose designed to be used with caster-mounted commercial kitchen equipment. The connector can be used on a wide variety of appliances such as ovens, fryers, ranges, grills and more. Pair it with a Quick Disconnect to easily and safely disconnect while performing routine maintenance or cleaning. Known for their durability and longevity, Krowne's movable gas connectors include a lifetime warranty and are the ideal solution for any commercial kitchen.

1 | ROTATIONAL ENDS


360° rotational ends provide versatility and ease during installation.

2 | WELDED CONSTRUCTION

360° heavy duty welds on both ends increase durability.

3 | CORRUGATED TUBING

Stainless steel corrugated tubing is built to be flexible for ease of installation.



SCAN TO
LEARN MORE

4 | RADIAL WRAP

Heavy duty stainless steel radial wrap prevents hose from stretching.

5 | PVC PROTECTIVE COATING

Includes antimicrobial agent for easy cleaning.

6 | LIFETIME WARRANTY



SCAN TO
LEARN MORE

1 | DURABLE STEEL SWIVEL FITTINGS

Heavy duty swivel fittings are corrosion-resistant and extend connector longevity.

2 | ANTIMICROBIAL YELLOW COATING

PVC protective coating is applied for added strength and durability.



STATIONARY GAS CONNECTOR

3 | STAINLESS STEEL CONSTRUCTION

304 stainless steel tubing provides flexibility and versatility during installation.

4 | 5 YEAR WARRANTY

Krowne's stationary gas connectors are the premier solution for installation of commercial fixed gas appliances. Durable stainless steel tubing with swivel end fittings allow for easy installation. Antimicrobial and UV resistant protective coating ensure a long lasting and safe operation. Krowne's stationary gas connectors are available in multiple lengths, interior diameters and kit configurations.



Movable Gas Connectors

Movable Gas Connectors are offered in a wide variety of lengths and interior diameters.

Lengths Offered				
24"	36"	48"	60"	72"

Interior Diameters Offered			
1/2"	3/4"	1"	1-1/4"

Krowne also offers a wide range of Movable Gas Connector Kits that include various parts & accessories. Use the chart below to find a suitable kit for any application.



M7548K Complete Kit


Model	Gas Connector	Quick Disconnect	Full Port Ball Valve	Restraining Cable Kit	Street 90° Elbows	SwivelKing	Rear Caster Positioning Checks
Complete Kit	✓	✓	✓	✓	✓	-	-
Kit 3	✓	✓	-	✓	✓	-	-
Kit 4	✓	✓	-	-	✓	-	-
Kit 5	✓	✓	-	-	-	-	-
Kit 6	✓	-	-	✓	-	-	-
Kit 8	✓	-	-	✓	✓	-	-
Kit 10	✓	✓	✓	✓	✓	✓✓	-
Kit 11	✓	✓	✓	✓	✓	✓	✓
Kit 12	✓	✓	✓	✓	✓	✓✓	✓
Kit 14	✓	✓	✓	✓	✓	-	✓
Complete Kit (Canada)	✓	✓	✓	✓	✓*	-	-

* Complete Kit (Canada) includes Street 90° Elbows with Nipples

✓✓ = Includes Two

Stationary Gas Connectors

Model	Length	I.D.	Gas Connector	Full Port Ball Valve	Street 90° Elbows
S7536*	36"	3/4"	✓	-	-
S7536B	36"	3/4"	✓	-	-
S7536K	36"	3/4"	✓	✓	✓
S7536K1	36"	3/4"	✓	-	✓
S7548*	48"	3/4"	✓	-	-
S7548B	48"	3/4"	✓	-	-
S7548K	48"	3/4"	✓	✓	✓
S7548K1	48"	3/4"	✓	-	✓

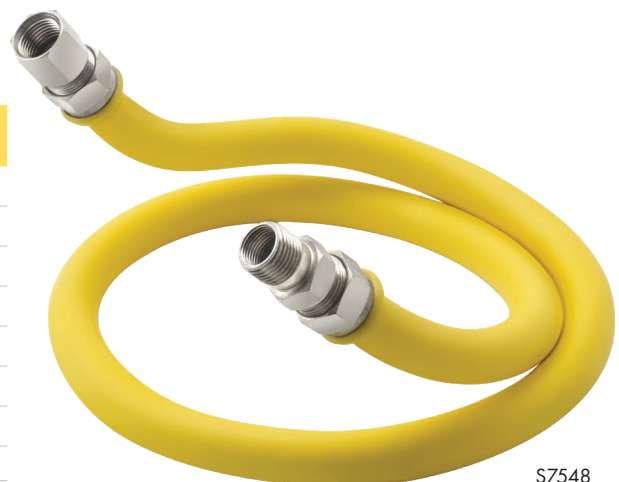

S7548

* S7536 and S7548 are packed in poly bags. All other models are packed in color packaging.

Parts & Accessories

SwivelKing

- Allows gas hose to swivel in tight areas
- Reduces stress on the hose from bending
- Full gas flow with no restriction
- 360° full rotation
- Female NPT x Male NPT



Model	Size
SW50	1/2"
SW75	3/4"
SW100	1"
SW125	1-1/4"

Caster Positioning Chocks

- Creates a home position for gas kitchen equipment and ensures equipment is returned back to the proper location after removal for cleaning and maintenance.



28-200



28-201

Model	Desc.
28-200	Rear Chocks

Model	Desc.
28-201	Front Chocks



Restraining Cable Kit

- Cable is 12" shorter than hose length to prevent moving appliance too far from wall
- Mounting hardware included

Model	Fits
R24	24" Hose
R36	36" Hose
R48	48" Hose
R60	60" Hose
R72	72" Hose



Quick Disconnect

- Allows for easy disconnect to move equipment for maintenance and cleaning

Model	Size
QD50	1/2"
QD75	3/4"
QD100	1"
QD125	1-1/4"



Full Port Ball Valve

- Required by code to allow manual gas shutoff within 5 ft. of appliance

Model	Size
G50	1/2"
G75	3/4"
G100	1"
G125	1-1/4"



E75



C75

Black Malleable Street 90° Elbows

Street 90° Elbows

Model	Size
E50	1/2"
E75	3/4"
E100	1"
E125	1-1/4"

Street 90° Elbows with Nipples

Model	Size
C50	1/2"
C75	3/4"
C100	1"
C125	1-1/4"



Gas Appliance Regulators

- RL50 & RL75 are set @ 10.0" W.C. with 5.0 - 12.0 spring installed
- RG50 & RG75 are set @ 3.5" W.C. with 3.0 - 6.0 spring installed

Liquid Propane	
Model	Size
RL50	1/2" NPT
RL75	3/4" NPT

Natural Gas	
Model	Size
RG50	1/2" NPT
RG75	3/4" NPT



Black Malleable Reducing Bushing

- Converts gas equipment with 1/2" inlet to use 3/4" gas connector for higher BTU flow

Model	Size
RB7550	3/4" x 1/2" Bushing


A photograph of two chefs in a kitchen. The chef in the foreground is wearing a white chef's coat and a white toque, looking down at a stainless steel pot he is holding. The chef in the background is also in a white chef's coat and toque, looking towards the first chef. The background is slightly blurred, showing other kitchen equipment and a person in the distance.


KROWNE[®]

Where **passion** meets **precision**.[®]

100 Haul Rd. Wayne, NJ 07470

krowne.com

 800.631.0442

 orders@krowne.com

 sales@krowne.com