

Open Stainless Steel Hose Reel with 35' Hose





Plumbing



Standard Features

- Provides water quickly and conveniently to all kitchen areas
- Used for a variety of applications such as filling buckets without lifting them from the floor, rinsing down sinks, worktables and floors during cleanup, as well as filling steam tables
- Equipped with mounting bracket so that it can be mounted on the floor, wall, or ceiling
- Positive latching operation ensures hose will hold at desired length
- Heavy duty specially designed retrieval springs allow for easy hose recoil
- Includes high flow spray valve with non-marring high impact resistant bumper
- 3/8" NPT Female Inlet
- Max operating pressure: 250 PSI
- Max Temperature 180°F

| Model | Description |
|--------|--------------------------------|
| 24-602 | Open Stainless Steel Hose Reel |

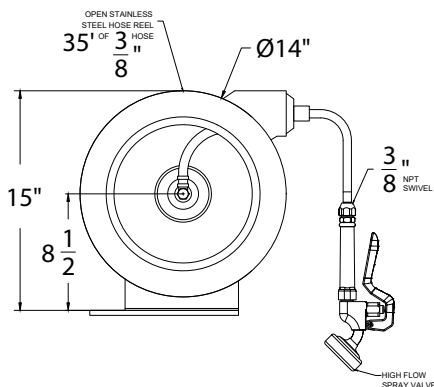

Replacement Parts & Accessories



21-126
Angled Spray Head
with Grip



24-604
35' Hose for Open
Hose Reels

Specifications

| | |
|---------------------------|-------------------------|
| Mounting Style | Wall, Floor, or Ceiling |
| Mounting Kit | Included |
| Finish | Stainless Steel |
| Max Operating Pressure | 250 PSI |
| Max Operating Temperature | 180°F |
| Reel Inlet Connection | 3/8" NPT Female |
| Hose Length | 35' |
| Weight (lb.) | 35 |

WARNING:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.