

Self-Contained Pass Thru Sliding Door Refrigeration

ROYAL SERIES



PTSD60L



Standard Features

- Doors on both sides make it accessible from front and back
- 1" Stainless Steel Top
- Heavy Duty Sliding Doors with built-in locks
- Built-in Cool White LED Lighting (7000K)
- All stainless steel, coved corner interior
- Digital thermostat
- DynamicChill 360° Technology
- NSF epoxy coated durable shelves, one bottom and two adjustable shelves per door
- Pre-drilled bottom for optional legs or casters (uses 1/4-20 self tapping 1/2"L screw)
- R290 Natural Refrigerant
- Eco-friendly refrigerant and insulation
- 5-Year compressor warranty
- 2-Year parts & labor warranty

Model	Length	Height	Depth	Doors	Amps	HP	Weight
PTSD60L	60"	36"	27-1/2"	4	2.2	1/4	380 lbs.
PTSD60R	60"	36"	27-1/2"	4	2.2	1/4	380 lbs.

Case Capacity

Base Model	Long Neck Bottles	12 oz. Cans	Wine Bottles
PTSD60	15.5	20	162

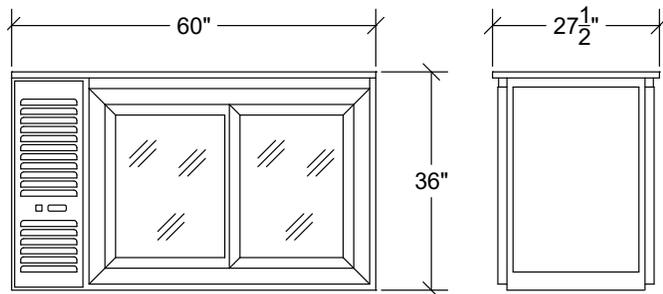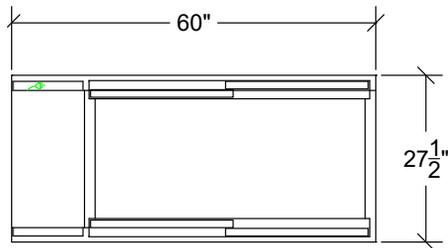

Specifications

Electrical	115V, 1 Phase, 60 Hz Furnished with 8' plug-in cord NEMA 5-15P plug configuration Dedicated 15 Amp circuit recommended
Refrigeration	R290 Hydrocarbon Refrigerant 30°F - 40°F operating range Digital thermostat on front grille
Plumbing	No drain required Condensate evaporator pan included
Insulation	2" thick foamed-in-place polyurethane
Interior	20 gauge stainless steel walls with coved corners NSF epoxy coated durable shelves - one bottom and two adjustable shelves per door
Exterior	Sides: 20 gauge stainless steel Front: Glass with black vinyl doors Back: Glass with black vinyl doors Top: 1" stainless steel top
Doors	Heavy duty, glass with black vinyl sliding doors 19-3/4"W x 29-11/16"H door opening

This equipment is intended for the storage and display of non-potentially hazardous bottle or canned products only.

This equipment is intended for use in an area where the ambient temperature typically does not exceed 75 °F.

Krowne • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • F: (973) 872-1129 • support@krowne.com • krowne.com

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Rev 0 • 2/2026 • No. 1.11 Self-Contained Pass Thru Refrigeration

