

24" Self-Contained Back Bar Refrigeration

ROYAL SERIES




BS24-KSS-R

Base Model	Length	Doors	Amps	Bottle Capacity	HP	Weight
BS24	24"	1	1.7	120	1/5	224 lbs.

Case Capacity

Model	Long Neck Bottles	12 oz. Cans	Wine Bottles
BS24	4.66	7.75	48

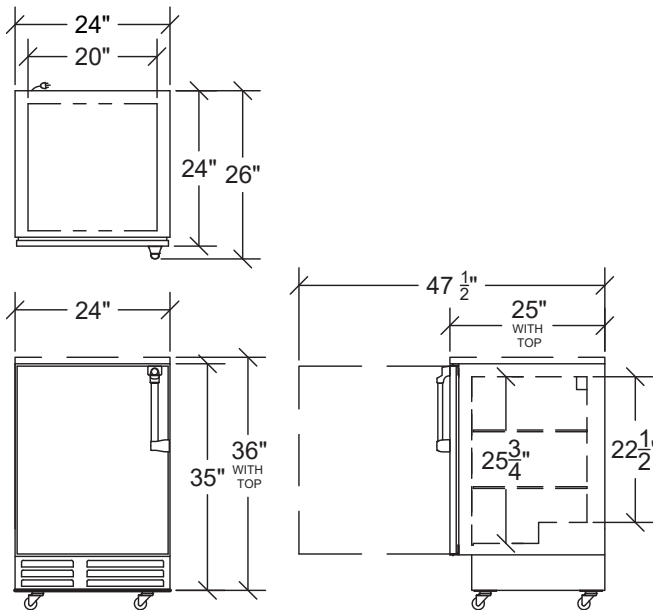

Standard Features

- 35" High without Top, 36" High with 1" Optional Top
- 24" Front to Back Depth (25" with Top)
- Coved corner stainless steel interior
- Heavy duty Self-Closing 24"W Door
- Stainless steel door handles with built-in locks
- Digital thermostat
- Built-in Cool White LED Lighting (7000K)
- DynamicChill 360° Technology
- Heated mullion to minimize condensation
- Approved for NSF 7 Open Food Storage
- Pre-drilled bottom for optional legs or casters (uses 1/4-20 self tapping 1/2"L screw)
- Eco-friendly Refrigerant and Insulation
- 5-Year Compressor Warranty
- 2-Year Parts & Labor Warranty

Specifications

Electrical	115 V, 1 Phase, 60 Hz Furnished with 8' plug-in cord, which exits left or right rear of cooler NEMA 5-15P plug configuration Dedicated 15 amp circuit recommended
Refrigeration	R290 Hydrocarbon Refrigerant 30°F - 40°F operating range
Plumbing	No drain required Condensate evaporator pan included
Insulation	2" thick foamed-in-place polyurethane
Interior	20 gauge stainless steel walls with coved corners NSF epoxy coated durable shelves - one bottom and two adjustable shelves per door
Exterior	Sides & Front: 20 gauge stainless steel Top: 20 gauge stainless steel with option of 1" top
Doors	Self-closing 24"W doors available in black vinyl, stainless steel, glass with black vinyl, or glass with stainless steel 19-3/4"W x 29-11/16" H door opening

WINE TEMPERATURE CONTROL *

Model	Description
BS-201	White Wine, 50°F-55°F
BS-202	Red Wine, 60°F-65°F

This equipment is intended for the storage and display of non-potentially hazardous bottle or canned products only.

This equipment is intended for use in an area where the ambient temperature typically does not exceed 75 °F.

Krowne • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • F: (973) 872-1129 • support@krowne.com • krowne.com

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Rev 0 • 2/2026 • No. 1.3B Self-Contained Refrigeration

