

Self-Contained Direct Draw Coolers



DB60L-SSS-LR
shown with optional stainless steel doors

Standard Features

- 36"H, 25" Front to Back Depth
- Additional beer tower options: up to 8 taps, four sixtels per door
- Available in standard door sizes 24", 36", 60", 72", 84" & 108"
- Available in narrow door size 52"
- Coved corner stainless steel interior
- Reinforced stainless steel keg floor and built-in kickplate for durability
- Stainless steel handles with built-in locks
- DynamicChill 360° Technology
- Heated mullion to minimize condensation
- Digital thermostat
- Standard operating range of 30° - 40°F (Set at 35°F) unless specified
- Pre-drilled bottom for optional casters (uses 1/4-20 self tapping 1/2L screw)
- R290 Hydrocarbon Refrigerant
- Eco-friendly Refrigerant and Insulation
- 5-Year Compressor Warranty
- 2-Year Parts & Labor Warranty

Specifications

<p>Electrical</p>	<p>115V, 1 Phase, 60 Hz Furnished with 8' plug-in cord, which exists left or right rear of cooler NEMA 5-15P plug configuration Dedicated 15 Amp circuit recommended 1 Door Units (24", 36"): 1.7 amps, 1/5 HP 2 Door Units (52"): 2.2 amps, 1/4 HP 2 Door Units (60"): 2.2 amps, 1/4 HP 3 Door Units (72"): 2.2 amps, 1/4 HP 3 Door Units (84"): 2.7 amps, 1/3 HP 4 Door Units (108"): 2.8 amps, 1/3 HP</p>	<p>Exterior</p> <p>Sides: 20 gauge stainless steel Front: 20 gauge stainless steel or black vinyl Top: 1" stainless steel top Up to 4 faucets: 16-1/4" x 15" drainer 5-10 faucets: 28-1/4" x 15" drainer</p>
<p>Refrigeration</p>	<p>R290 Hydrocarbon Refrigerant 30°F - 40°F operating range Digital thermostat on front grille</p>	<p>Doors</p> <p>Standard Door models: 24"W doors Narrow Door models: 20"W doors Black Vinyl standard door finish (Stainless Steel upgrade available) Stainless steel handles with built-in locks</p>
<p>Plumbing</p>	<p>No drain required Condensate evaporator pan included 1/2" drain line provided from beer drainer exits bottom front of refrigeration compartment</p>	<p>Faucets</p> <p>1 Door Units (24", 36"): 1 Faucet 2 Door Units (52", 60"): 2 Faucets 2 Door Units (72"): 3 Faucets 4 Door Units (84"): 4 Faucets 4 Door Units (108"): 5 Faucets Additional beer tower options available, up to 8 taps, four sixtels per door</p>
<p>Insulation</p>	<p>2" thick foamed-in-place polyurethane</p>	<p>Keg Capacity</p> <p>Please check our website for full list of keg capacity configurations</p>
<p>Interior</p>	<p>20 gauge stainless steel walls with coved corners Removable corrugated stainless steel floor racks Standard door opening: 19-3/4"W x 29-11/16"H Narrow door opening: 15-3/4"W x 29-11/16"H</p>	

This equipment is intended for the storage and display of non-potentially hazardous bottle or canned products only.


This equipment is intended for use in an area where the ambient temperature typically does not exceed 75 °F.



Self-Contained Direct Draw Coolers


Standard Door Side View

Applies to Models beginning DB36, DB60, DB72, DB84, DB108

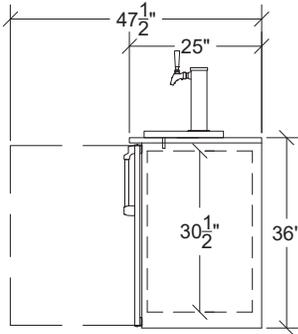


Narrow Door Side View

Applies to Models beginning DB52

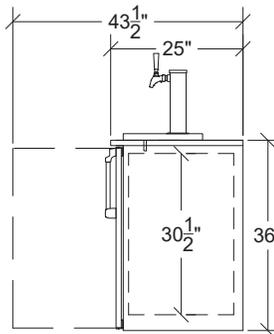


Standard Door Side View

Applies to Models beginning DB24

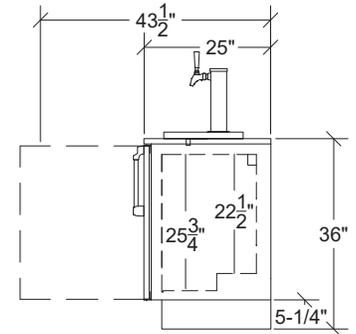


One Door (24")

Models beginning DB24, 230 lbs. (250 lbs. with top)

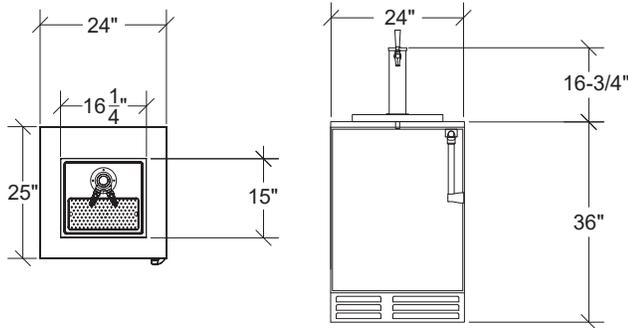


One Door (36")

Models beginning DB36, 285 lbs. (305 lbs. with top)

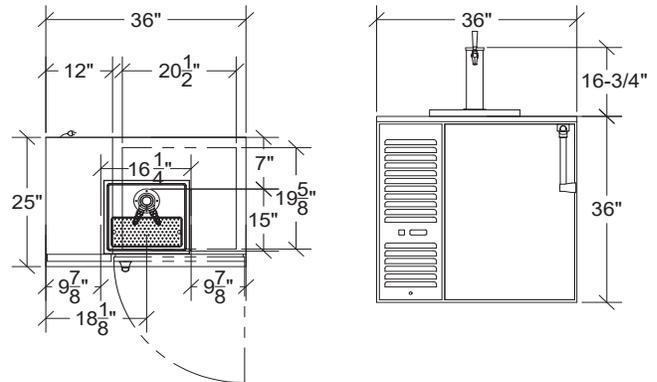


Two Door (52")

Models beginning DB52, 300 lbs. (320 lbs. with top)

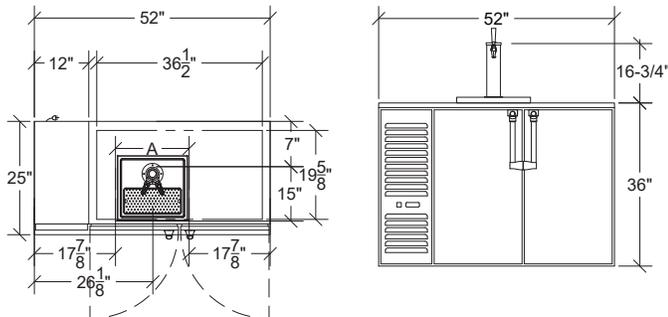

Two Door (60")

Models beginning DB60, 360 lbs. (380 lbs. with top)

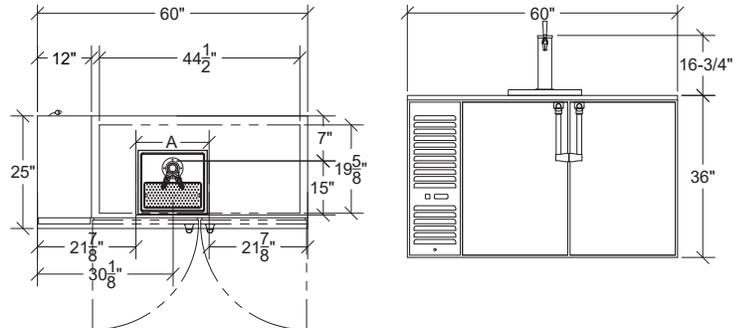


Taps	1-5	6-8
A	16-1/4"	28-1/4"

Taps	1-5	6-8
A	16-1/4"	28-1/4"

Self-Contained Direct Draw Coolers

Two Door (72")


Models beginning DB72, 420 lbs. (445 lbs. with top)

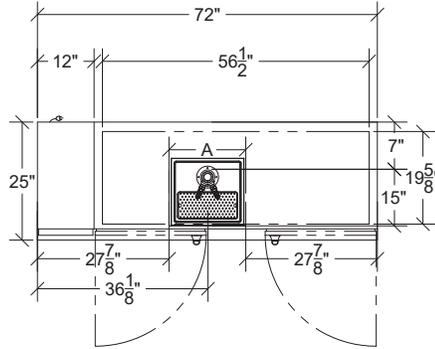

Taps	1-5	6-8
A	16-1/4"	28-1/4"

Three Door (84")


Models beginning DB84, 480 lbs. (505 lbs. with top)

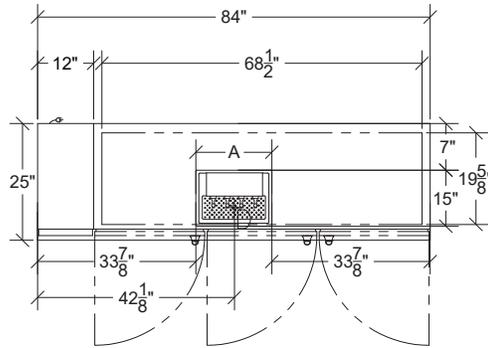

Taps	1-5	6-8
A	16-1/4"	28-1/4"

Four Door (108")

Models beginning DB108, 525 lbs. (580 lbs. with top)

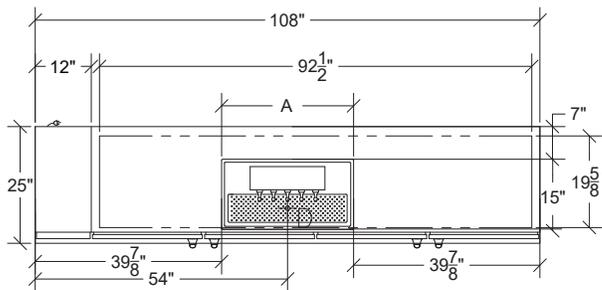

Taps	1-5	6-8
A	16-1/4"	28-1/4"