

4" Center Deck Mount Faucets

ROYAL SERIES



Standard Features

- ¼ Turn Ceramic Valves
- Durable Full Range Swing Spout with Double O-Ring Construction
- Lever Handles (VR Wristblade Handles Available)

Specifications

Water Inlet ▪ 1/2" NPS Male

Temp. Range ▪ 40°F - 180°F

Rough In ▪ 7/8" Round Holes on 4" Center

Flow Rate ▪ 1.8 GPM





Material ▪ Chrome Plated Brass

Product Compliance

- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1
- ASME A112.18.1-2012/CSA BA125.1-12
- Massachusetts Approved
- CEC Approved
- Meets ANSI A117.1 (ADA)



Model	Spout Type	Spout Length (A)	Spout Height (B)	Base to Top (C)	Weight
11-400L	Gooseneck	3-1/2"	5-5/8"	8-1/4"	2 lbs.
11-401L	Gooseneck	6-1/4"	5-5/8"	9-1/2"	2.5 lbs.
11-406L	Standard	6-1/8"	2-3/8"	4-3/4"	2 lbs.
11-412L	Standard	12"	3-3/8"	5-3/4"	2.25 lbs.
11-435L	Double Bend	4-1/2"	4-3/8"	6-7/8"	3 lbs.
11-460L	Double Bend	6"	6-7/8"	9-3/8"	3.5 lbs.

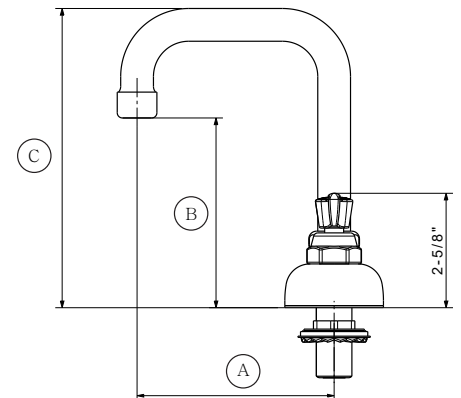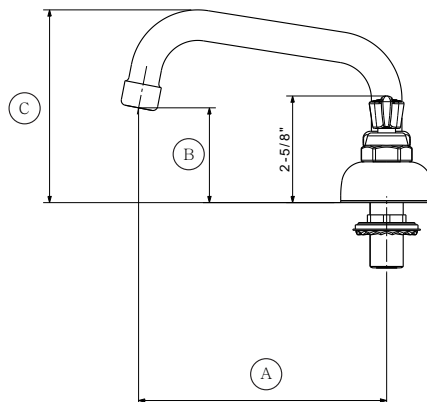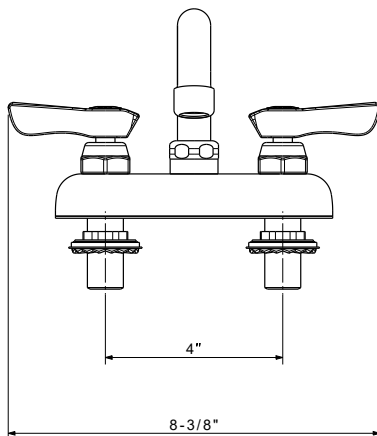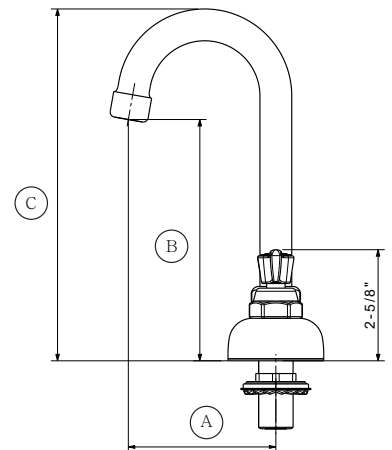

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.