

## 4" Center Wall Mount Faucets

## ROYAL SERIES



14-400L



14-406L

Model	Max Height (A)	Spout Height (B)	Spout Length (C)	Spout Type
14-400L	9-1/8"	5-7/8"	3-1/2"	Wide Gooseneck
14-401L	9-3/4"	5-7/8"	6"	Wide Gooseneck
14-402L	12-7/8"	8-1/4"	8-1/2"	Wide Gooseneck
14-406L	5"	2"	6"	Swing
14-408L	5-3/4"	2-3/4"	8"	Swing
14-410L	6-1/2"	3-1/2"	10"	Swing
14-4XXL	-	-	-	Base Only

### Standard Features


- 4" center wall mounted
- 1/4 turn high performance ceramic valves with integral check
- Lever handles (vandal resistance wristblade handles available)
- Durable full range swing spout with double o-ring construction
- Mounting kit includes, (2) brass locknuts and (2) brass washers
- Hot and Cold color indicators

### Specifications



Water Inlet	1/2" NPS Male
Temp. Range	40°F - 180°F
Rough In	7/8" Round Holes on 4" Center
Flow Rate	1.8 GPM
Material	Chrome Plated Brass
Weight	5 lbs.

### Product Compliance

- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1
- ASME A112.18.1-2011/CSA B125.1-11
- Meets ANSI A117.1 (ADA)
- CEC Listed
- Massachusetts Approved

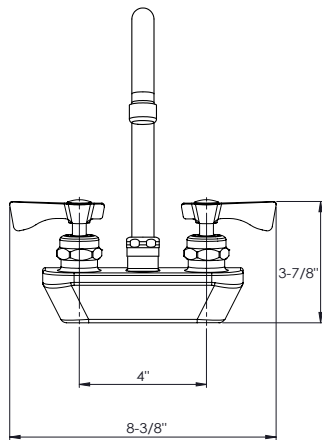

Front View

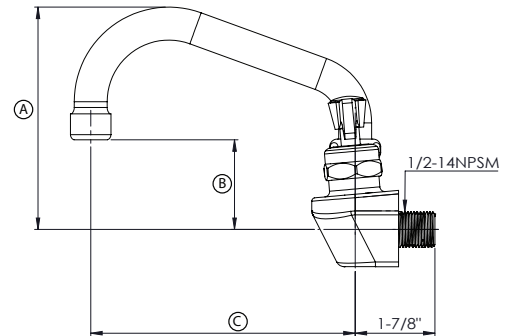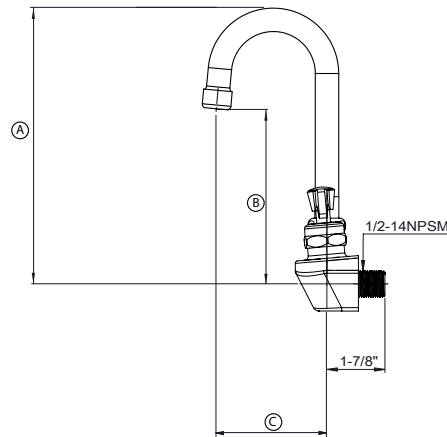

#### Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

#### California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).