

4" Center Deck Mount Faucets

ROYAL SERIES



15-306L



15-301L

Model	Spout Type	Spout Length (A)	Spout Height (B)	Base to Top (C)	Weight
15-301L	Gooseneck	6"	6-1/8"	10"	4.5 lbs.
15-302L	Gooseneck	8-1/2"	8-1/2"	13-1/8"	4.5 lbs.
15-306L	Standard	6"	2-1/4"	5-1/4"	3.75 lbs.
15-308L	Standard	8"	3"	6"	3.75 lbs.
15-310L	Standard	10"	3-3/4"	6-3/4"	3.75 lbs.
15-312L	Standard	12"	4-3/8"	7-3/8"	3.75 lbs.
15-314L	Standard	14"	5-1/8"	8-1/8"	4 lbs.
15-316L	Standard	16"	5-7/8"	8-7/8"	4.25 lbs.
15-325L	Gooseneck	3-1/2"	6-1/4"	8-3/4"	4.25 lbs.
15-3XXL	Base Only	-	-	3-1/4"	3 lbs.

Standard Features




- 1/4 turn high performance ceramic cartridge valves with integral check
- Durable full range swing spout with double o-ring construction
- Lever handles with a vandal resistant wrist blade handle upgrade option

Specifications

Water Inlet	1/2" NPS Male
Temp. Range	40°F - 180°F
Rough In	7/8" Round Holes on 4" Center
Flow Rate	1.8 GPM
Material	Chrome Plated Brass

Product Compliance

- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1
- ASME A112.18.1-2011/CSA B125.1-11 & NSF/ANSI 372
- Massachusetts Listed
- CEC Listed

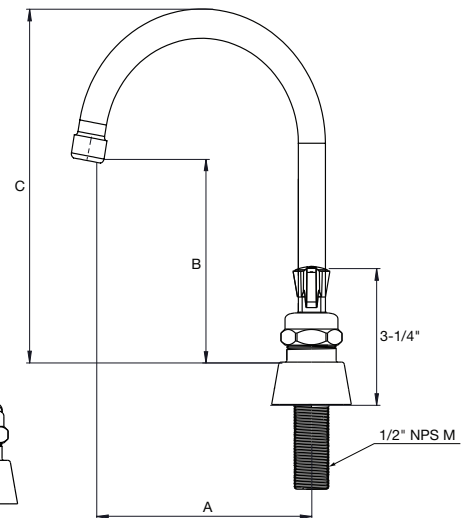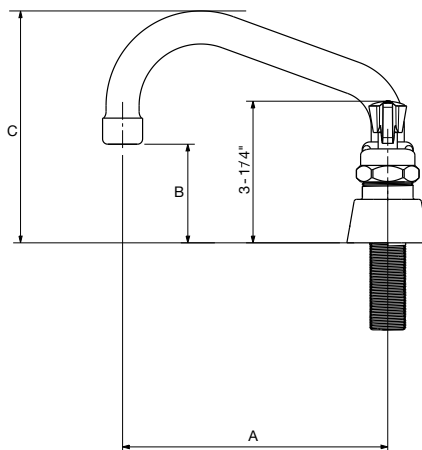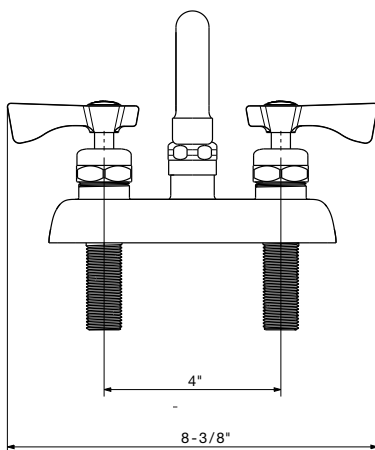

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.