

8" Center Deck Mount Faucets

ROYAL SERIES



Standard Features

- 1/4 turn high performance ceramic cartridge valves with integral check
- Durable full range swing spout with double o-ring construction
- Lever handles with a vandal resistant wrist blade handle upgrade option




Specifications

Water Inlet	▪ 1/2" NPS Male
Temp. Range	▪ 40°F - 180°F
Rough In	▪ 7/8" Round Holes on 4" Center
Flow Rate	▪ 1.8 GPM
Material	▪ Chrome Plated Brass

Model	Spout Type	Spout Length (A)	Spout Height (B)	Base to Top (C)	Weight
15-501L	Gooseneck	6-1/4"	6-1/8"	10"	4.5 lbs.
15-502L	Gooseneck	8-1/8"	8-1/2"	13-1/8"	4.5 lbs.
15-506L	Standard	6"	2-1/4"	5-1/4"	4.5 lbs.
15-508L	Standard	8"	3"	6"	4.5 lbs.
15-510L	Standard	10"	3-3/4"	6-3/4"	4.5 lbs.
15-512L	Standard	12"	4-3/8"	7-3/8"	4.75 lbs.
15-514L	Standard	14"	5-1/8"	8-1/8"	4.5 lbs.
15-516L	Standard	16"	5-7/8"	8-7/8"	4.5 lbs.
15-525L	Gooseneck	3-1/2"	6-1/4"	8-3/4"	4.5 lbs.
15-5XXL	-	-	-	3-1/4"	3.5 lbs.

Product Compliance

- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1
- ASME A112.18.1-2011/CSA B125.1-11
- Massachusetts Approved
- CEC Approved

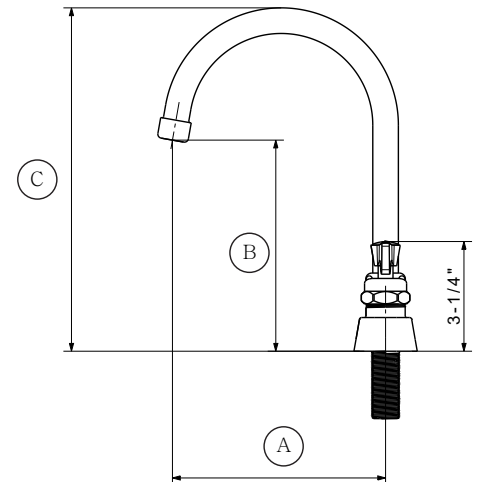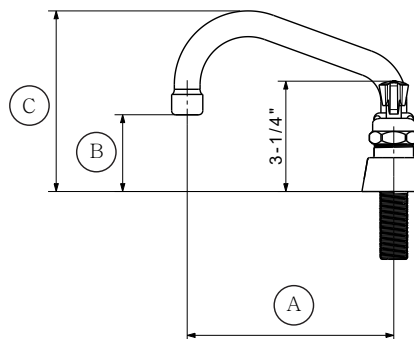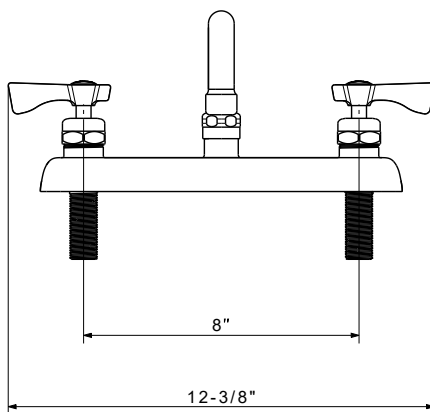

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.