

Single Hole Wall Mount Pot Filler Faucet

ROYAL SERIES



16-178L



16-181L



16-179L



16-182L

| Model | Spout Length (A) | Joint Length (B) | Spout Height (C) | Overall Height (D) | Spout Type | Weight |
|---------|------------------|------------------|------------------|--------------------|------------|----------|
| 16-178L | 6" | - | 2-1/4" | 5-3/4" | Swing | 3 lbs. |
| 16-179L | 6" | 6" | 5-1/2" | 9" | Jointed | 3.5 lbs. |
| 16-181L | 6" | 12" | 5-1/2" | 9" | Jointed | 3 lbs. |
| 16-182L | 12" | 12" | 5-3/4" | 9-1/2" | Jointed | 3.5 lbs. |

Standard Features


- Single hole, single temp
- 1/4 turn high-performance ceramic cartridge valve with integral check
- Full flow with cross handle shut-off at end of spout
- Durable full range swing spout with double o-ring construction
- Mounting kit included

Specifications

| | |
|-------------|---------------------|
| Water Inlet | 1/2" NPS Male |
| Temp. Range | 40°F - 180°F |
| Rough In | 7/8" |
| Flow Rate | 4.15 GPM |
| Material | Chrome Plated Brass |

Product Compliance

- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1
- ASME A112.18.1-2012/CSA B125.1-12
- Massachusetts Approved

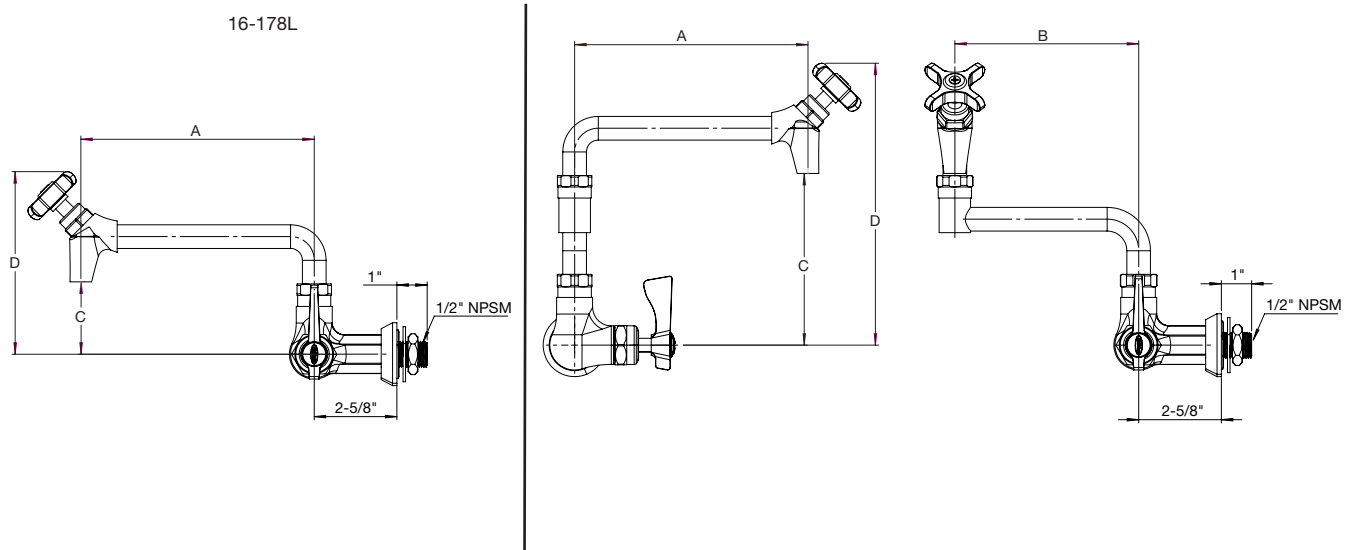

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.