

Model:	Item #:	Date:
Project:	Qty:	Approved By:

## ROYAL SERIES



**Single Hole Wall Mount Faucet** 

Model	Spout Length (A)	Spout Height (B)	Weight	Flow Rate	Spout Type
16-170L	6"	2-1/4"	2.5 lbs.	1.8 GPM	Standard
16-171L	12"	4-7/16"	2.5 lbs.	1.8 GPM	Standard
16-178L	See Drawing	See Drawing	3 lbs.	4.1 GPM	Standard Pot-Filler
16-179L	See Drawing	See Drawing	3.5 lbs.	4.1 GPM	Jointed- Pot-Filler

### **Standard Features**


- Single hole, single temp
- Durable full range swing spout with double o-ring construction
- 1/4 Turn high performance ceramic cartridge valve with integral check

## **Specifications**

Water Inlet	er Inlet 1/2" NPS Ma		
Temp. Range	40°F - 180°F		
Rough In	7/8"		
Material	Chrome Plated Brass		

### **Product Compliance**

- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1</li>
- ASME A112.18.1-2011/CSA B125.1-11
- Massachusetts Approved
- CEC Approved

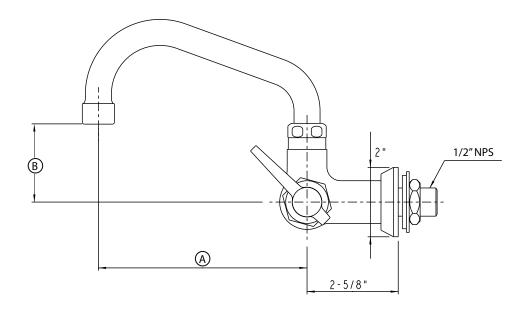

#### Warning

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

#### California Prop 65 Warning:


This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.




Model:	Item #:	Date:
Project:	Qty:	Approved By:

# **Single Hole Wall Mount Faucet**

# ROYAL SERIES

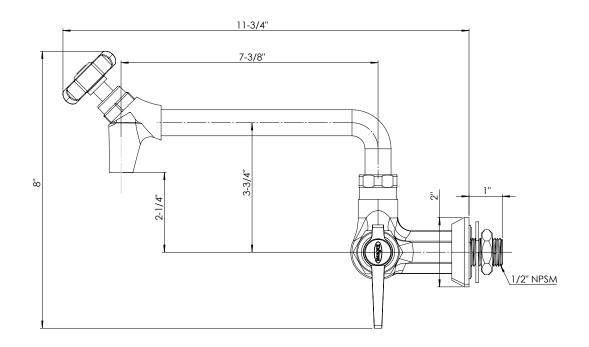

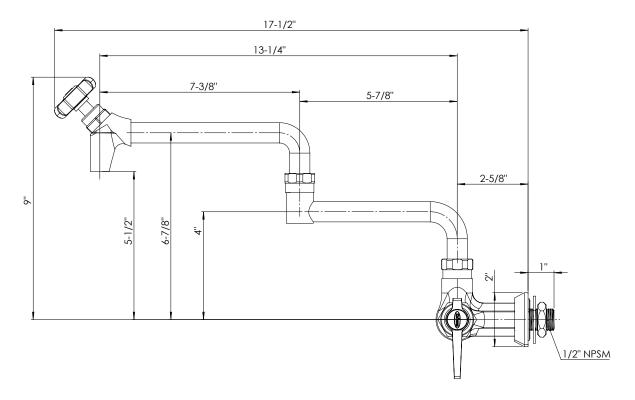

#### Warning

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

#### California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.