

Model:	Item #:	Date:
Project:	Other	Approved By:

Electronic Sensor Faucet Single Hole Wall Mount


ROYAL SERIES



Model	Description	
16-190	Electronic Sensor Faucet Single Hole Wall Mount with 4-1/2" Wide Gooseneck Spout	
16-191	Electronic Sensor Faucet Single Hole Wall Mount with 6" Wide Gooseneck Spout	

Product Compliance

- NSF/ANSI/CAN 61 Q<1
- NSF/ANSI/CAN 372-2022
- ASME A112.18.1/CSA B125.1
- UL1951, CAN/CSA C22.2 No. 68, CAN/CSA C22.2 No. 14
- Massachusettes Approved
- CEC Approved
- Meets ANSI A117.1 (ADA)



(NSE)

Warning:

2-3/16"


Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

Standard Features

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Built-in filter to prevent debris from entering solenoid valve
- Low battery indicator light
- Battery life 1-3 years based on usage

Specifications

Water Inlet	 3/8" NPS Male 	
Temp. Range	■ 40°F - 180°F	
Water Pressure	• 20-120 PSI	
Sensor Type	Infrared	
Flow Rate	• 2.2 GPM	
Default Time Out	■ 30 Seconds	
Default GPC	• 1.10	
Default Shut-Off Delay	■ 1 Second	
Default Auto Flush	• Off	
Sensor Range	3 /4"- 8-1/4"	
Battery Life	• 500,000 cycles	
Material	Solid Brass	
Finish	 Polished Chrome 	
Weight	• 1.5 lbs.	

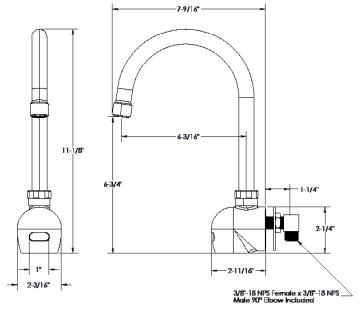

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.



Model:	Item #:	Date:
Project:	Qty:	Approved By:

Electronic Sensor Faucet Single Hole Wall Mount


ROYAL SERIES

Flow Control	Setting				
Shut-Off Delay	1s	10	Os		15s
Auto Flush	ON		OFF		
Auto Timo Out	150 200 250	300	150	1m	2m 10m

Auto Time Out 15s 20s 25s 30s 45s 1m 2m 10m

Default Flow Control Setting Highlighted in Gray

No.	Replacement Parts	Model
1	Flat Sensor with Cable	16-505
2	Spout Supply Hose	16-512
3	Control Module	16-198
4	Mechanical Mixing Valve	16-402L
5	Water Supply Hoses	16-510
6	Optional AC Adapter	16-199

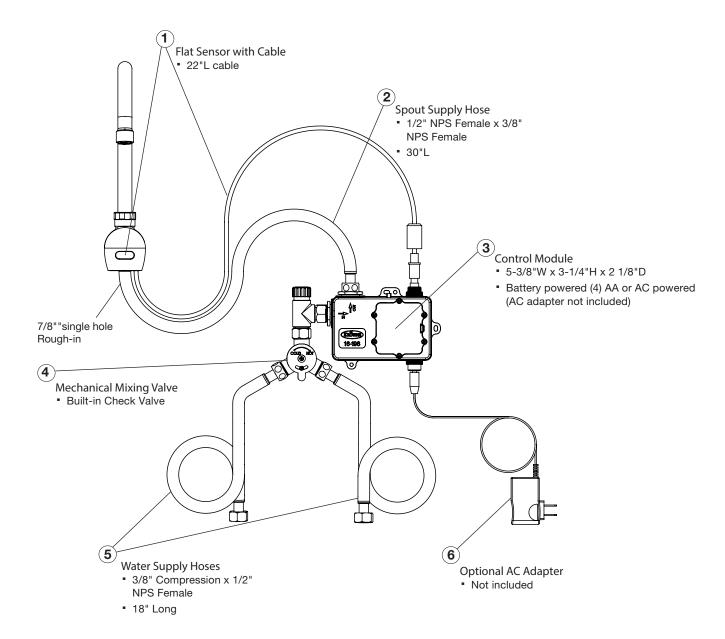

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.