

## Electronic Sensor Faucet Single Hole Deck Mount


ROYAL SERIES



Model	Description
16-196	Royal Series Single Hole Deck Mount Sensor, Battery Operated, Mechanical Mixing Valve, 0.5 GPM Aerator
16-196P	Royal Series Single Hole Deck Mount Sensor Faucet, Battery Operated, Mechanical Mixing Valve, 4" Deck Plate, 0.50 GPM Aerator
16-196P8	Royal Series Single Hole Deck Mount Sensor Faucet, Battery Operated, Mechanical Mixing Valve, 8" Deck Plate, 0.50 GPM Aerator

### Product Compliance

- NSF/ANSI/CAN 61 Q<1
- NSF/ANSI/CAN 372-2022
- ASME A112.18.1/CSA B125.1
- UL1951, CAN/CSA C22.2 No. 68, CAN/CSA C22.2 No. 14
- Massachusetts Approved
- CEC Approved
- Meets ANSI A117.1 (ADA)

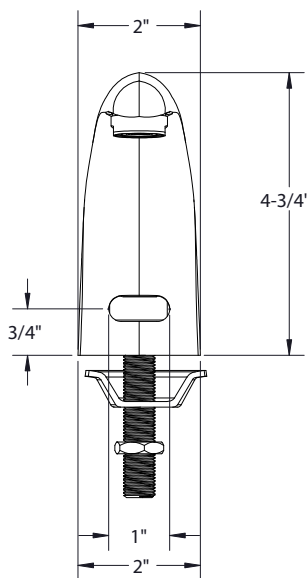

#### Warning:


Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

### Standard Features

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Built-in filter to prevent debris from entering solenoid valve
- Low battery indicator light
- Battery life 1-3 years based on usage

### Specifications

Water Inlet	3/8" NPS Male
Temp. Range	40°F - 180°F
Water Pressure	20-120 PSI
Sensor Type	Infrared
Flow Rate	0.5 GPM
Default Time Out	30 Seconds
Default GPC	0.25
Default Shut-Off Delay	1 Second
Default Auto Flush	Off
Sensor Range	3/4" - 8-1/4"
Battery Life	500,000 cycles
Material	Solid Brass
Finished	Polished Chrome
Weight	7 lbs.

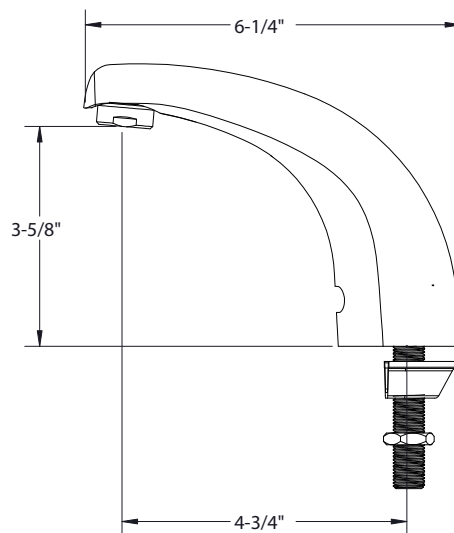

#### California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.cdph.ca.gov/Programs/CID/DCDC/Pages/ToxicSubstancesAndHazardousWastes.aspx](http://www.cdph.ca.gov/Programs/CID/DCDC/Pages/ToxicSubstancesAndHazardousWastes.aspx)


## Electronic Sensor Faucet Single Hole Deck Mount

ROYAL SERIES

Flow Control	Setting			
Shut-Off Delay	1s	10s	15s	
Auto Flush	ON		OFF	
Auto Time Out	15s	20s	25s	30s 45s 1m 2m 10m

Default Flow Control Setting Highlighted in Gray

No.	Replacement Parts	Model
1	Flat Sensor with Cable	16-505
2	Spout Supply Hose	16-511
3	Control Module	16-198
4	Mechanical Mixing Valve	16-402L
5	Water Supply Hoses	16-510
6	Optional AC Adapter	16-199

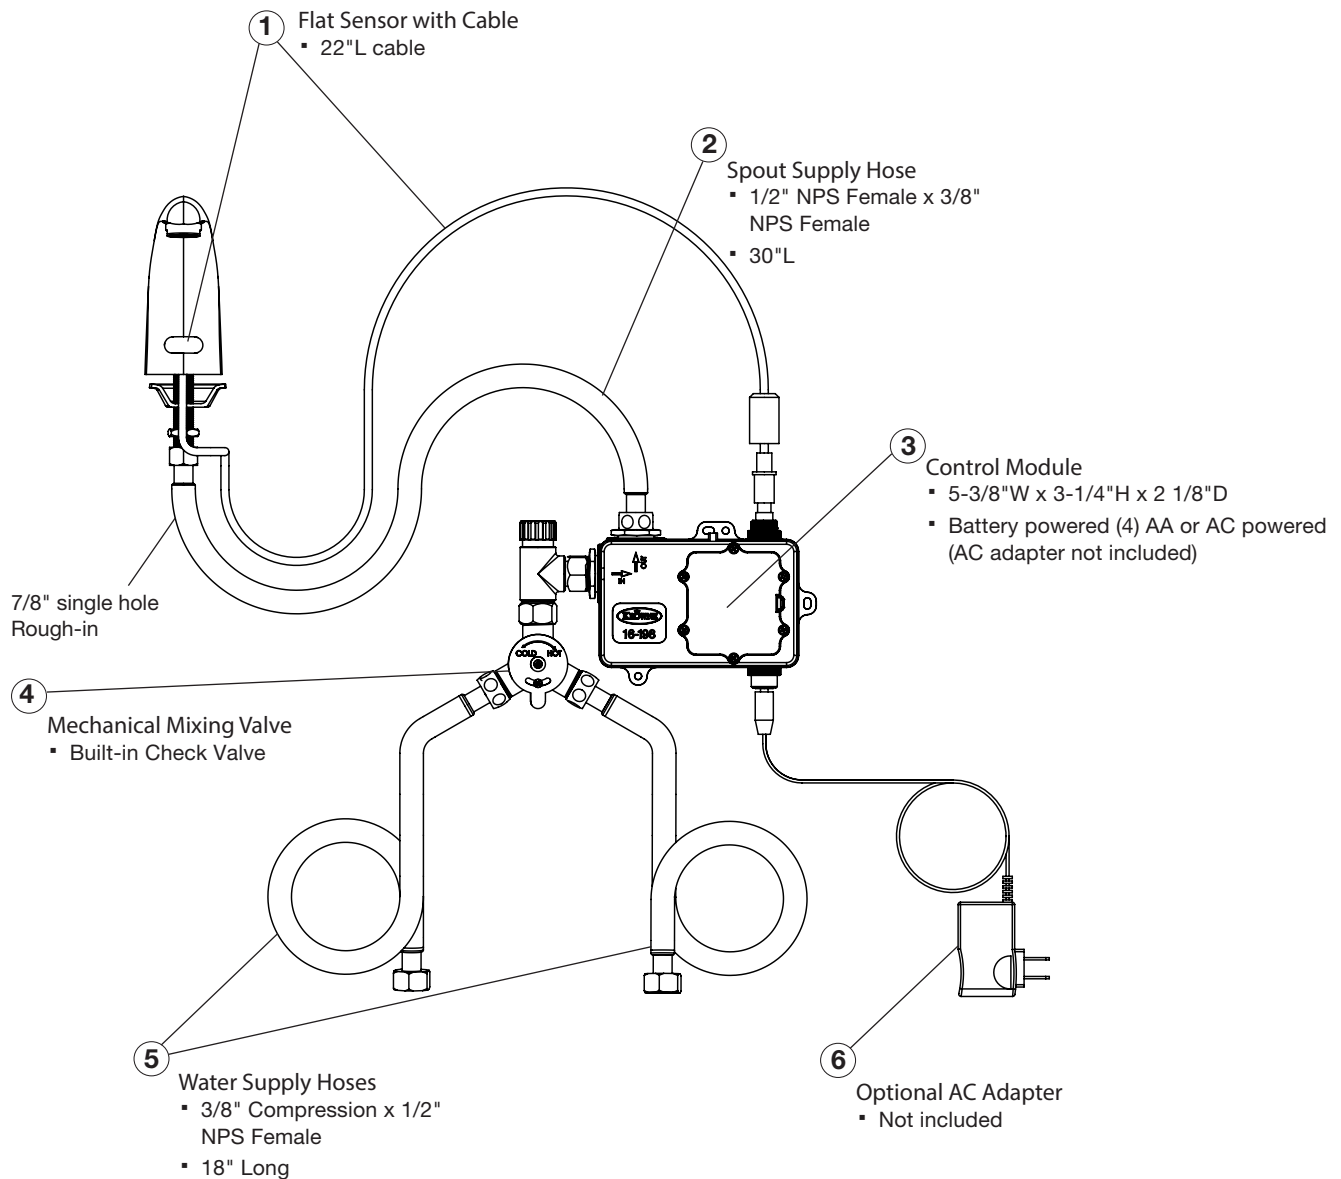

### Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

### California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.cdph.ca](http://www.cdph.ca)