Project:_____

___ Approved By:

Service Sink Faucet with 6-1/2" Spout

Standard Features

Lever handles

Qty:_

- Flanges with eccentric fittings
- 1/4 turn ceramic valves
- Built-in service stops in body
- Includes wall bracket for spout support
- 6-1/2" vacuum breaker spout with pail hook and 3/4" hose thread (spout not removable)

Specifications

2-13/16"

Water Inlet	1/2" NPT Female
Temp. Range	40°F - 180°F
Pressure	20 - 120 PSI
Rough In	3/8" round holes on 8" center
Flow Rate	13.6 GPM
Material	Solid brass
Finish	Rough chrome
Weight	5 lbs.

WARNING:

Model

16-290

Description

 Product Compliance
 ASME A112.18.1-2012/CSA B125.1-12 & CSA B64

Meets ANSI A117.1 (ADA)Massachusetts Approved

ASSE 1001 (VB)

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.


California Prop 65 Warning:

6

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

 Krowne
 • 100 Haul Rd. Wayne, NJ 07470
 • P: (800) 631-0442
 • F: (973) 872-1129
 • customerservice@krowne.com
 • krowne.com

 Due to our commitment to continued product improvement, specifications are subject to change without notice.
 Rev. 6/2023
 • No. 16-290

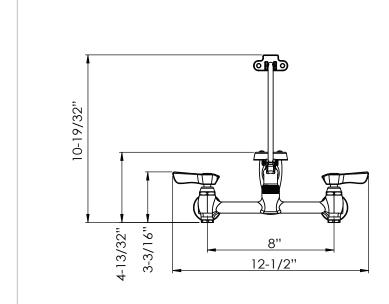



Service Sink Faucet with 6-1/2" Spout

(NSF.)

S₽°

(ち

KRÖWNE

Royal Series Plumbing