

## Single Hole Deck Mount Pantry Faucet

## ROYAL SERIES



### Standard Features

- 1/4 Turn high performance ceramic cartridge valve with integral check
- Pre-installed 20" length water lines with 3/8" compression fittings
- Durable full range swing spout with double o-ring construction
- Lever handles




### Specifications

Water Inlet	3/8" Compression
Temp. Range	40°F - 180°F
Pressure	20-120 PSI
Rough In	1-1/4" Single Hole
Flow Rate	1.8 GPM
Material	Solid Brass
Finish	Polished Chrome

Model	Spout Type	Spout Length (A)	Spout Height (B)	Base to Top (C)	Weight
16-301L	Gooseneck	6"	5-5/16"	14-7/16"	5 lbs.
16-302L	Gooseneck	8-1/2"	8-3/4"	18-1/16"	5 lbs.
16-306L	Standard	6"	2-7/16"	10-1/8"	5.25 lbs.
16-312L	Standard	12"	4-5/8"	12-1/4"	5.25 lbs.

### Product Compliance

- NSF-61 & NSF/ANSI 372
- NSF/ANSI/CAN 61: Q < 1
- ASME A112.18.1-2012/CSA BA125.1-12
- Massachusetts Approved
- CEC Approved

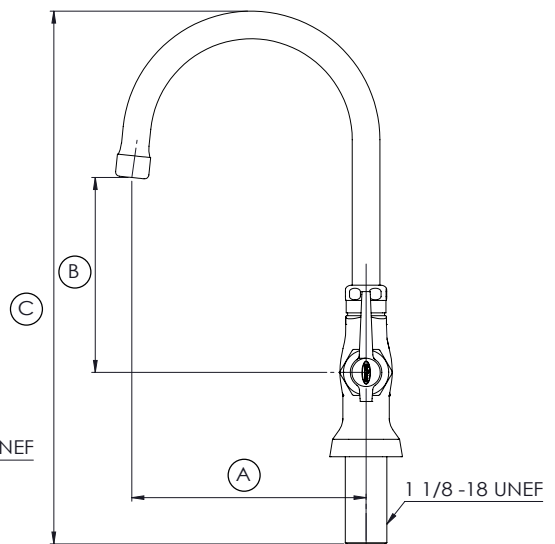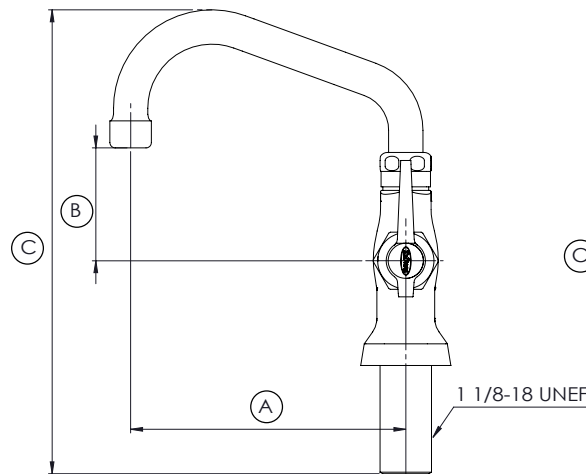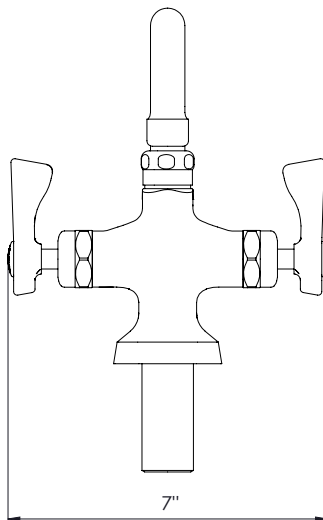

20" Water Line

#### Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

#### California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.cdph.ca](http://www.cdph.ca)