


Electronic Sensor Pitcher Filler

ROYAL SERIES

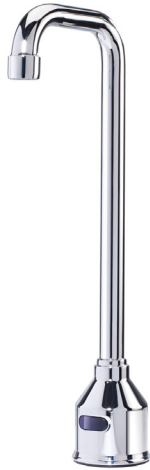

Standard Features

- Includes control module, mixing valve, and 3 supply lines
- Infrared sensor operated
- Sensor operating range 3/4" to 7-3/4", factory set at 6"
- Easy adjust shut-off delay, auto flush, auto time-out, and range sensitivity
- Uses (4) AA alkaline batteries
- 12"H from deck to spout tip
- Low battery indicator light
- 30 seconds auto shut-off


Specifications

Water Inlet	1/4" NPS Male
Temp. Range	36°F - 185°F
Rough In	7/8" Round Hole
Flow Rate	1.5 GPM
Material	Stainless Steel 304
Weight	2 lbs.

Model	Description
16-648	Deck Mount Electronic Sensor Pitcher Filler

Product Compliance

- NSF/ANSI/CAN 61 Q<1
- NSF/ANSI/CAN 372-2022
- Meets ANSI A117.1 (ADA)

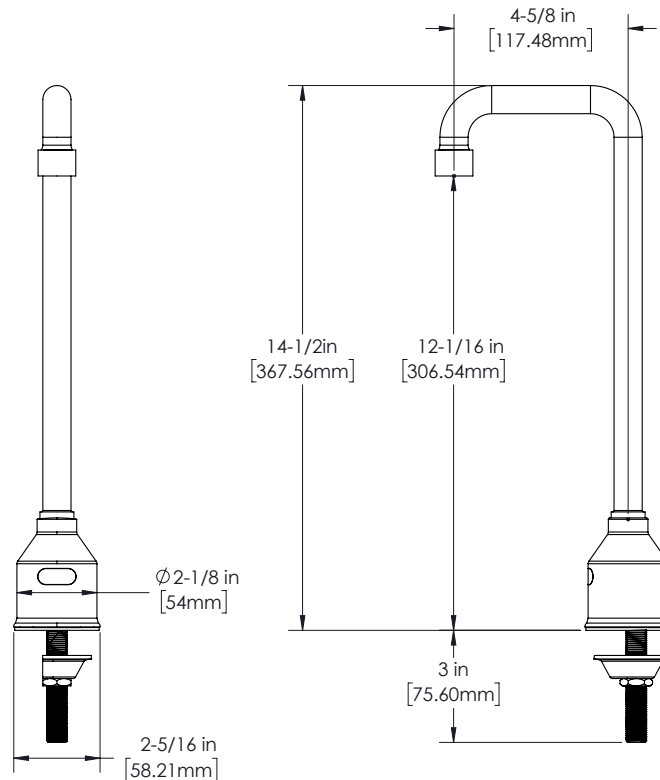

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.cdph.ca