

Project:

lte

Qty:\_\_

Item #:\_\_\_\_\_ Date:\_

\_\_\_\_ Approved By:\_\_\_

## **4" Wall Mount Faucet** with 4-1/2" Wide Double Bend Gooseneck Spout

**DX-400** 

DIAM®ND series



## **PRODUCT COMPLIANCE**

- ASME A112.18.1/CSA B125.1
- NSF-61
- NSF/ANSI 372
- Meets ANSI A117.1 (ADA)




## DESCRIPTION

4" Center Wall Mount Faucet with 4-1/2 Wide Double Bend Gooseneck Spout, Ultra-Polish Satin Finish, 1.8 GPM Female Aerator Installed

## **STANDARD FEATURES**

- 1/4 turn stainless steel high performance ceramic cartridge valves with built-in check valves
- Heavy duty flanges with eccentric fittings and flange seal technology
- Lever handles
- Mounting kit included
- E-Z install flexible water line kit included
- Lifetime Warranty

SPECIFICATIONS	
Water Inlet	1/2" NPS Male
Temp. Range	40°F - 180°F
Pressure	20-120 PSI
Rough In	7/8" Round Holes on 8" Center
Flow Rate	1.8 GPM
Material	Solid Brass
Finish	Ultra-Polish Satin
Weight	5 lbs.

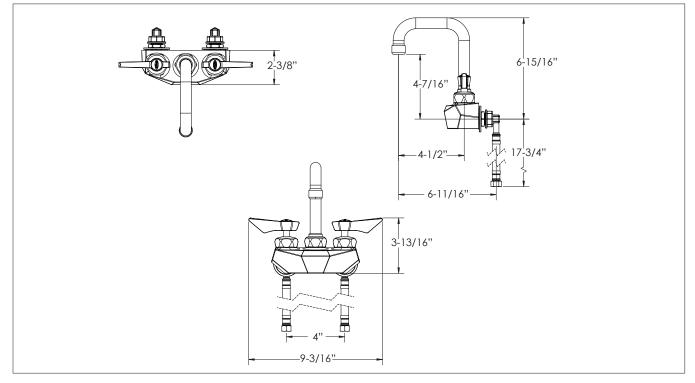

WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes. California Proposition 65 Warning

 Krowne Metal Corporation
 • 100 Haul Rd. Wayne, NJ 07470
 • P: (800) 631-0442
 • customerservice@krowne.com
 • krowne.com

 Due to our commitment to continued product improvement, specifications are subject to change without notice.
 Rev. 10/2021
 • No. DX-400