



KROWN<sup>®</sup>

Where **passion** meets **precision**.

# THE ULTIMATE GAS CONNECTOR GUIDE



Krowne  
100 Haul Rd.  
Wayne, NJ 07470

[krowne.com](http://krowne.com)



# THE ULTIMATE GAS CONNECTOR

Krowne's movable gas connector is a stainless steel gas hose designed to be used with caster-mounted commercial kitchen equipment. The connector can be used on a wide variety of appliances such as ovens, fryers, ranges, grills and more. Pair it with a Quick Disconnect to easily and safely disconnect while performing routine maintenance or cleaning. Known for their durability and longevity, Krowne's movable gas connectors include a lifetime warranty and are the ideal solution for any commercial kitchen.

## 1 | ROTATIONAL ENDS


360° rotational ends provide versatility and ease during installation.

## 2 | WELDED CONSTRUCTION

360° heavy duty welds on both ends increase durability.

## 3 | CORRUGATED TUBING

Stainless steel corrugated tubing is built to be flexible for ease of installation.



SCAN TO  
LEARN MORE


#### 4 | RADIAL WRAP


Heavy duty stainless steel radial wrap prevents hose from stretching.

#### 5 | PVC PROTECTIVE COATING

Includes antimicrobial agent for easy cleaning.

#### 6 | 5 YEAR WARRANTY

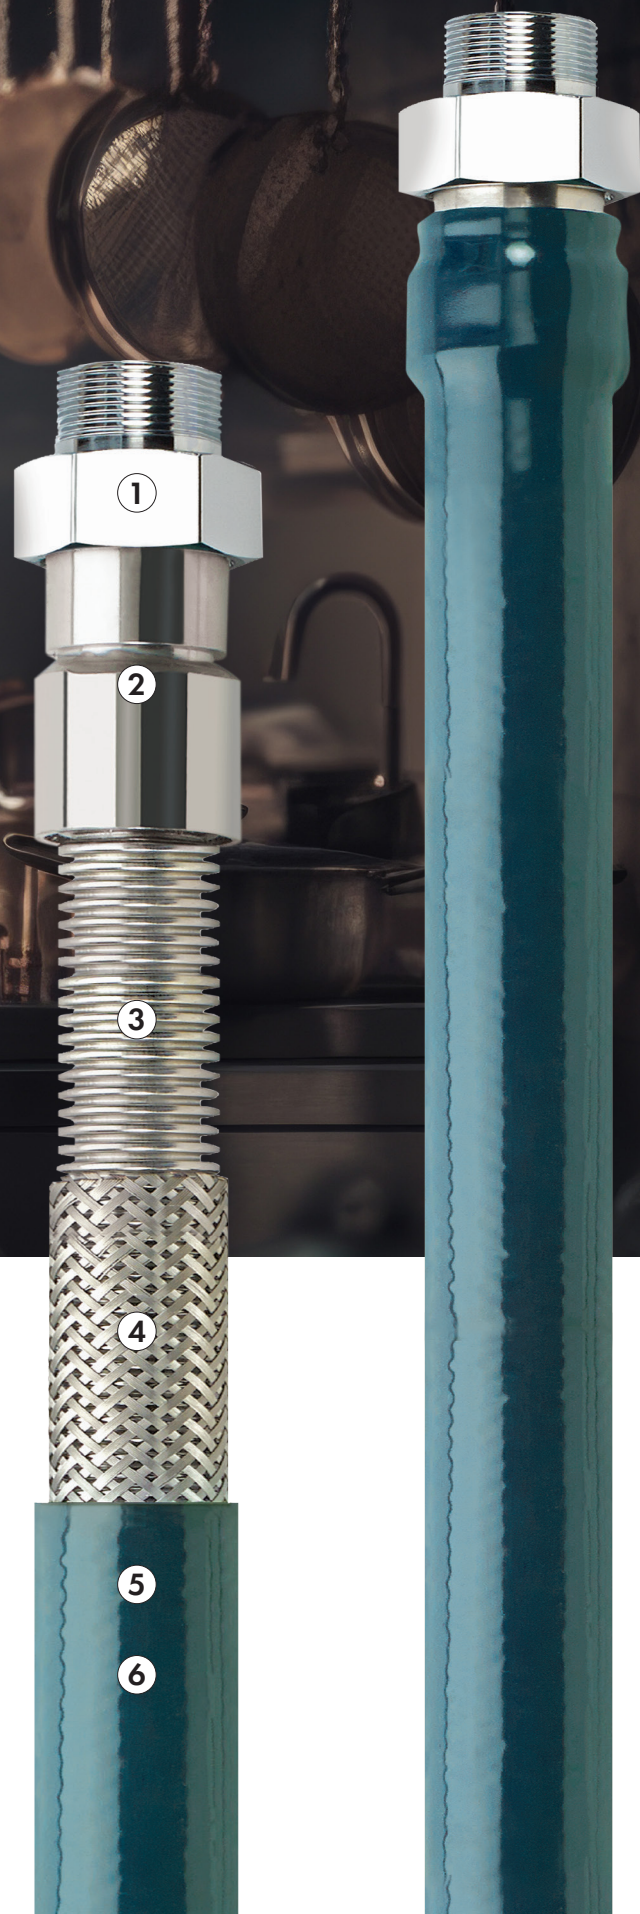

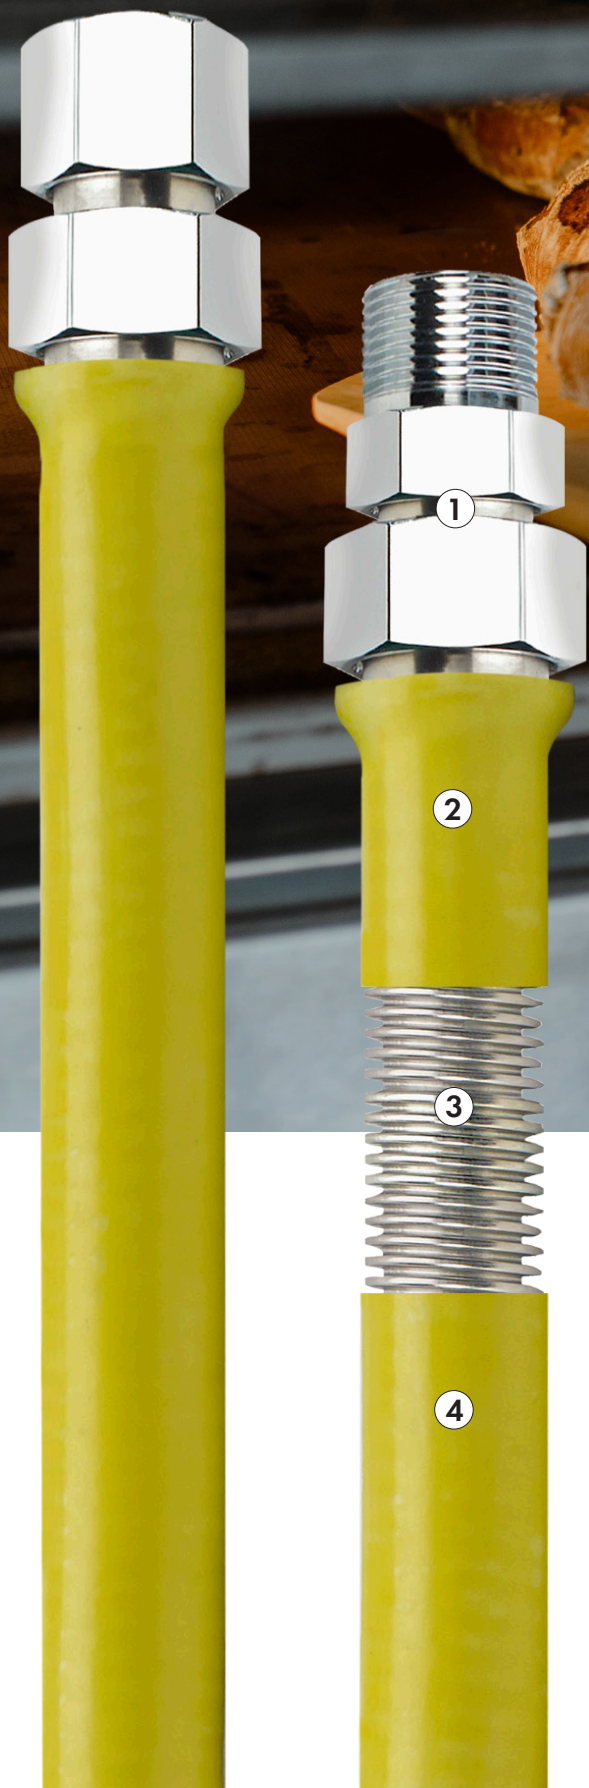

SCAN TO  
LEARN MORE

#### 1 | DURABLE STEEL SWIVEL FITTINGS

Heavy duty swivel fittings are corrosion-resistant and extend connector longevity.

#### 2 | ANTIMICROBIAL YELLOW COATING

PVC protective coating is applied for added strength and durability.



# STATIONARY GAS CONNECTOR

## 3 | STAINLESS STEEL CONSTRUCTION

304 stainless steel tubing provides flexibility and versatility during installation.

## 4 | 5 YEAR WARRANTY

Krowne's stationary gas connectors are the premier solution for installation of commercial fixed gas appliances. Durable stainless steel tubing with swivel end fittings allow for easy installation. Antimicrobial and UV resistant protective coating ensure a long lasting and safe operation. Krowne's stationary gas connectors are available in multiple lengths, interior diameters and kit configurations.



# Movable Gas Connectors

Movable Gas Connectors are offered in a wide variety of lengths and interior diameters.

| Lengths Offered |     |     |     |     |
|-----------------|-----|-----|-----|-----|
| 24"             | 36" | 48" | 60" | 72" |

| Interior Diameters Offered |      |    |        |
|----------------------------|------|----|--------|
| 1/2"                       | 3/4" | 1" | 1-1/4" |

Krowne also offers a wide range of Movable Gas Connector Kits that include various parts & accessories. Use the chart below to find a suitable kit for any application.



M7548K Complete Kit


| Model                 | Gas Connector | Quick Disconnect | Full Port Ball Valve | Restraining Cable Kit | Street 90° Elbows | SwivelKing | Rear Caster Positioning Chocks |
|-----------------------|---------------|------------------|----------------------|-----------------------|-------------------|------------|--------------------------------|
| Complete Kit          | ✓             | ✓                | ✓                    | ✓                     | ✓                 | -          | -                              |
| Kit 3                 | ✓             | ✓                | -                    | ✓                     | ✓                 | -          | -                              |
| Kit 4                 | ✓             | ✓                | -                    | -                     | ✓                 | -          | -                              |
| Kit 5                 | ✓             | ✓                | -                    | -                     | -                 | -          | -                              |
| Kit 6                 | ✓             | -                | -                    | ✓                     | -                 | -          | -                              |
| Kit 8                 | ✓             | -                | -                    | ✓                     | ✓                 | -          | -                              |
| Kit 10                | ✓             | ✓                | ✓                    | ✓                     | ✓                 | ✓✓         | -                              |
| Kit 11                | ✓             | ✓                | ✓                    | ✓                     | ✓                 | ✓          | ✓                              |
| Kit 12                | ✓             | ✓                | ✓                    | ✓                     | ✓                 | ✓✓         | ✓                              |
| Kit 14                | ✓             | ✓                | ✓                    | ✓                     | ✓                 | -          | ✓                              |
| Complete Kit (Canada) | ✓             | ✓                | ✓                    | ✓                     | ✓*                | -          | -                              |

\* Complete Kit (Canada) includes Street 90° Elbows with Nipples

✓✓ = Includes Two

# Stationary Gas Connectors

| Model   | Length | I.D. | Gas Connector | Full Port Ball Valve | Street 90° Elbows |
|---------|--------|------|---------------|----------------------|-------------------|
| S7536*  | 36"    | 3/4" | ✓             | -                    | -                 |
| S7536B  | 36"    | 3/4" | ✓             | -                    | -                 |
| S7536K  | 36"    | 3/4" | ✓             | ✓                    | ✓                 |
| S7536K1 | 36"    | 3/4" | ✓             | -                    | ✓                 |
| S7548*  | 48"    | 3/4" | ✓             | -                    | -                 |
| S7548B  | 48"    | 3/4" | ✓             | -                    | -                 |
| S7548K  | 48"    | 3/4" | ✓             | ✓                    | ✓                 |
| S7548K1 | 48"    | 3/4" | ✓             | -                    | ✓                 |

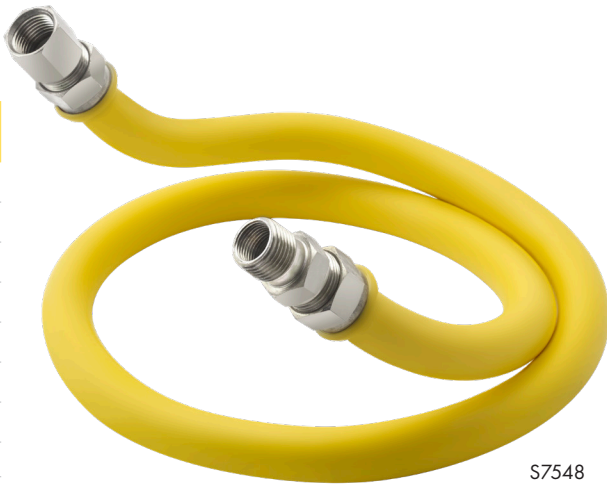

S7548

\* S7536 and S7548 are packed in poly bags. All other models are packed in color packaging.

# Parts & Accessories

## SwivelKing

- Allows gas hose to swivel in tight areas
- Reduces stress on the hose from bending
- Full gas flow with no restriction
- 360° full rotation
- Female NPT x Male NPT



| Model | Size   |
|-------|--------|
| SW50  | 1/2"   |
| SW75  | 3/4"   |
| SW100 | 1"     |
| SW125 | 1-1/4" |

## Caster Positioning Chocks

- Creates a home position for gas kitchen equipment and ensures equipment is returned back to the proper location after removal for cleaning and maintenance.



28-200



28-201

| Model  | Desc.       |
|--------|-------------|
| 28-200 | Rear Chocks |

| Model  | Desc.        |
|--------|--------------|
| 28-201 | Front Chocks |



## Restraining Cable Kit

- Cable is 12" shorter than hose length to prevent moving appliance too far from wall
- Mounting hardware included

| Model | Fits     |
|-------|----------|
| R24   | 24" Hose |
| R36   | 36" Hose |
| R48   | 48" Hose |
| R60   | 60" Hose |
| R72   | 72" Hose |



## Quick Disconnect

- Allows for easy disconnect to move equipment for maintenance and cleaning

| Model | Size   |
|-------|--------|
| QD50  | 1/2"   |
| QD75  | 3/4"   |
| QD100 | 1"     |
| QD125 | 1-1/4" |



## Full Port Ball Valve

- Required by code to allow manual gas shutoff within 5 ft. of appliance

| Model | Size   |
|-------|--------|
| G50   | 1/2"   |
| G75   | 3/4"   |
| G100  | 1"     |
| G125  | 1-1/4" |



E75



C75

## Black Malleable Street 90° Elbows

### Street 90° Elbows

| Model | Size   |
|-------|--------|
| E50   | 1/2"   |
| E75   | 3/4"   |
| E100  | 1"     |
| E125  | 1-1/4" |

### Street 90° Elbows with Nipples

| Model | Size   |
|-------|--------|
| C50   | 1/2"   |
| C75   | 3/4"   |
| C100  | 1"     |
| C125  | 1-1/4" |



## Gas Appliance Regulators

- RL50 & RL75 are set @ 10.0" W.C. with 5.0 - 12.0 spring installed
- RG50 & RG75 are set @ 3.5" W.C. with 3.0 - 6.0 spring installed

| Liquid Propane |          |
|----------------|----------|
| Model          | Size     |
| RL50           | 1/2" NPT |
| RL75           | 3/4" NPT |

| Natural Gas |          |
|-------------|----------|
| Model       | Size     |
| RG50        | 1/2" NPT |
| RG75        | 3/4" NPT |



## Black Malleable Reducing Bushing

- Converts gas equipment with 1/2" inlet to use 3/4" gas connector for higher BTU flow

| Model  | Size                |
|--------|---------------------|
| RB7550 | 3/4" x 1/2" Bushing |

A photograph of two chefs in a kitchen. The chef in the foreground is wearing a white chef's coat and a white toque, looking down at a stainless steel pot he is holding. The chef in the background is also in a white chef's coat and toque, looking towards the first chef. The background is slightly blurred, showing other kitchen equipment and a warm, ambient light.

# KROWNE<sup>®</sup>

Where **passion** meets **precision.**

100 Haul Rd. Wayne, NJ 07470

[krowne.com](http://krowne.com)

 800.631.0442

 [orders@krowne.com](mailto:orders@krowne.com)

 [sales@krowne.com](mailto:sales@krowne.com)