

Front Door Glasswasher

ROYAL SERIES




GWD-24

Standard Features

- Low temperature glass washer
- 12-1/8" door opening, ideal for racked glasses (Counter-balanced door)
- Digital LED Thermostat
- Protects glasses and mugs from chipping and breaking
- Vari-cycle button allows unlimited number of user selectable cycle times
- Fill and drain type operation. Rinse water is re-used for next cycle's wash water
- Delime feature allows easy deliming of wash cavity
- Auto-clean flushes tank interior at end of serving period
- Flexible fill and drain lines
- Flow regulator/line strainer - no PRV required
- Liquid detergent, sanitizer and rinse-aid dispensing pumps complete w/ prime switches
- Two 20" x 20" racks, one peg, one flat (25 racks per hour)
- Single phase 115 V connection, 12 amps
- Free 1 year warranty if glass washing dump sink is purchased and placed next to glasswasher in bar line-up

Model	Description
GWD-24	24" Front Door Glasswasher

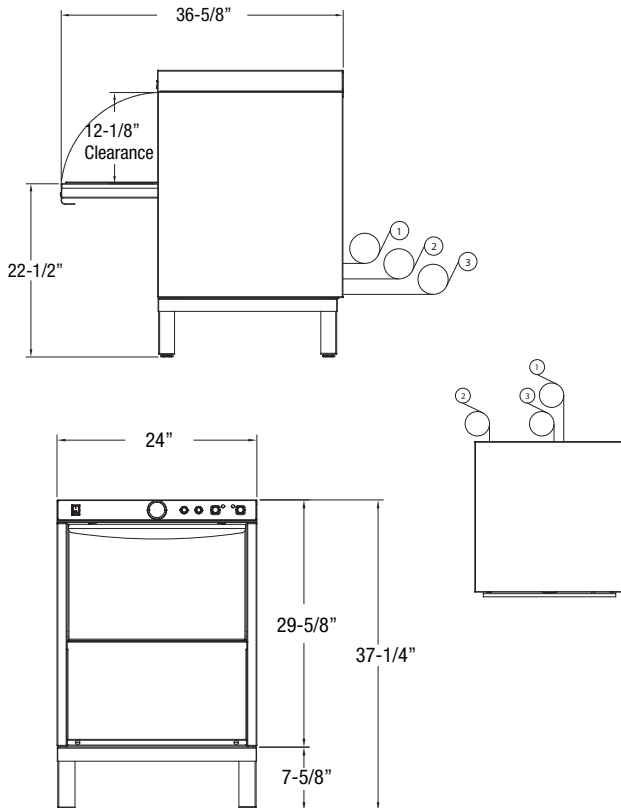

Specifications

Electrical	115/60/1; 12 amp draw; to be fused at 15 amp; 4 ft. plug-in cord supplied
Water Connection	120°F Min 1/2" supply hot water connection, 6' long, 1/2" I.D. flexible fill hose with 3/4" connector Flow pressure; 25-95 PSI
Drain Connection	6' long, 5/8" I.D. flexible drain hose Max drain flow: 15 US gpm.
Capacity	25 Racks (per hr)
Motor Horsepower	Wash: 1 HP
Water Consumption	US Gal Max Use (per hr): 38 Gal US Gal per rack: 1.5 Gal
Temperatures	Wash (min): 140°F Rinse (min): 140°F
Heating	Tank Heat, electric: 0.75 kW
Time Cycle	Wash: 90 seconds Rinse: 26 seconds Drain/Fill: 25 seconds Total Cycle: 141 seconds
Weight	210 lbs.

Note: Allow additional 3" clearance from wall.

Warning:
Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary, and safety codes

