

Front Door Heat Recovery Glasswasher

ROYAL SERIES




GWH-24


Standard Features

- High Temperature Glass Washer
- Heat recovery using cold water feed only, up to 50% more efficient - reduces operation costs
- Improved and quicker drying where condensation is removed using RAPID-DRY
- Soft Start cycle protects glasses and mugs from chipping and breaking
- Deep drawn, type 316 stainless steel tank
- 12-1/8" door opening, 22-1/2" loading height
- Multi-cycle; 3 cycle time options for enhanced cleaning
- Delime and Auto-clean features - flush tank interior and easy delimiting of wash cavity
- Electric tank heater (2 kW); flexible fill and drain lines
- Digital temperature displays and microcomputer controls
- Easy installation standard pumped drain
- Liquid detergent and rinse-aid dispensing pumps complete with prime switches
- Two 20" x 20" racks, one peg, one flat (25 racks per hour)
- Free 1 year warranty if glass washing dump sink is purchased and placed next to glasswasher in bar line-up

Model	Description
GWH-24	24" Front Door Heat Recovery Glasswasher

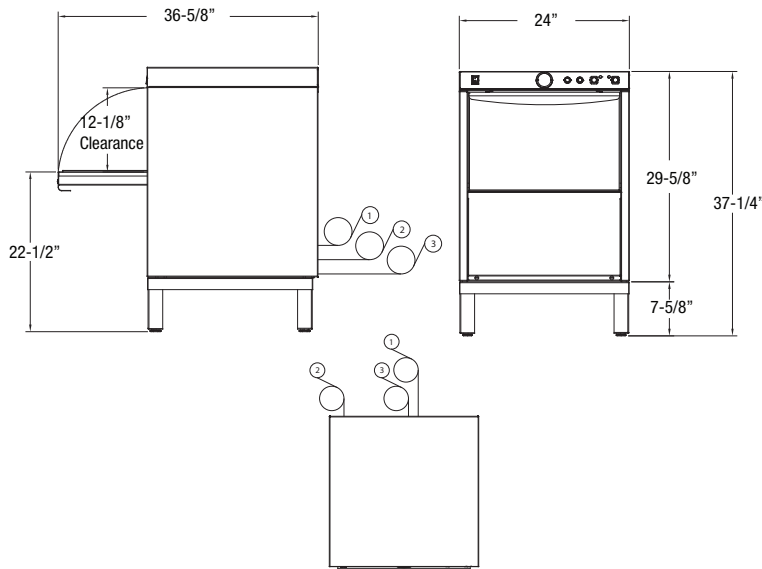

*Note: Electrical supply service must be a 3 or 4 wire plus ground for connection as shown.

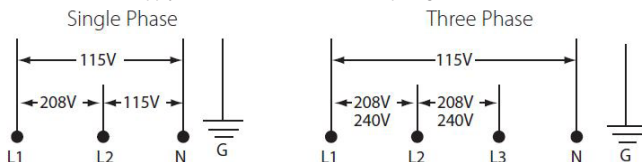

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary, and safety codes

Specifications

	208-240/60/1; 3 wire plus ground
Electrical	208-240/60/3; 4 wire plus ground
	Field convertible to accept 3 phase power
Water Connection	1/2" supply; 55 - 85°F cold water; 25 PSI min.
	Machine equipped with 3/4" hose connector
Drain Connection	6' long, 5/8" I.D. flexible drain hose
	Max drain flow: 15 US gpm.
	Max drain height: 3'
Capacity	25 Racks (per hr)
Motor Horsepower	Wash: 1 HP
Water Consumption	US Gal Max Use (per hr): 15.6 Gal
	US Gal per rack: 0.65 Gal
Temperatures	Wash (min): 150°F
	Rinse (min): 180°F
Heating	Tank Heat, electric: 2 kW
	Electric Booster: 5 kW
	Wash: 45/120/197 seconds
Time Cycle	Rinse: 13 seconds
	Drain/Fill: 62 seconds
Weight	198 lbs.

Note: Allow additional 3" clearance from wall.

Electrical Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protection Device
208/60/1	32	40	40
240/60/1	36	40	40
208/60/3	22	30	30
240/60/3	24	30	30

