



Mini Tank Water Heater, 2.5 Gallons

ROYAL SERIES

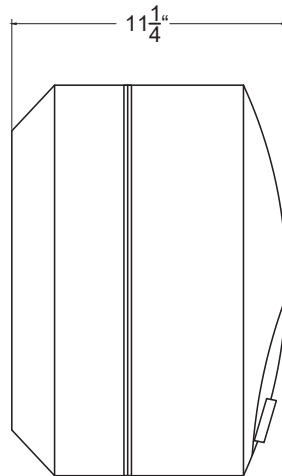

Model	Description
HS-MTH25	Mini Tank Water Heater, 2.5 Gallons

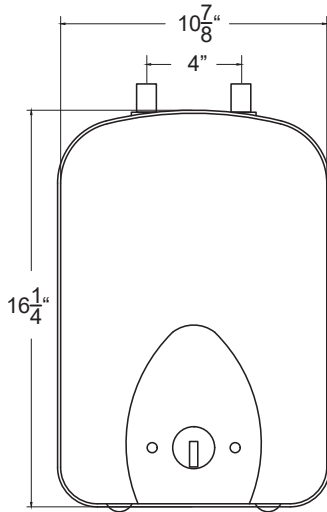

Standard Features

- Point-of-use heating eliminates long hot water pipe runs
- Used for hand washing
- Compact design fits virtually anywhere
- Easy and ready to install, single weld design
- Hot or cold water feed
- T&P relief valve included
- Enameled glass lined tank for extended life
- Floor and wall mountable, wall bracket included
- Field replaceable element
- All units plug into standard outlets, cord included
- Tank status indicator light – Green: ready mode, Red: heating mode

Specifications

Voltage	120V
Amp	12 A
Heating Capacity	1440 watts
Water Inlet	1/2" NPT
Recovery Time	15 minutes at 60° inlet water temp
Phase	1 Phase
Temp. Range	50°F - 140°F
Max Operating Pressure	150 PSI
Tank Volume	2.5 Gallons
Weight	20 lbs.

Product Compliance

- ETL tested to UL 174 and NSF 372



Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:


This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Mini Tank Water Heater, 2.5 Gallons


ROYAL SERIES

Recovery Time
15 minutes at 60° inlet
water temperature


Standalone Point-of-Use Heating Application

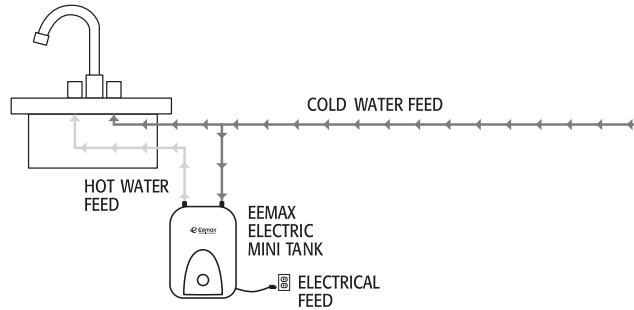

Standalone Point-of-Use Multi Fixture Application

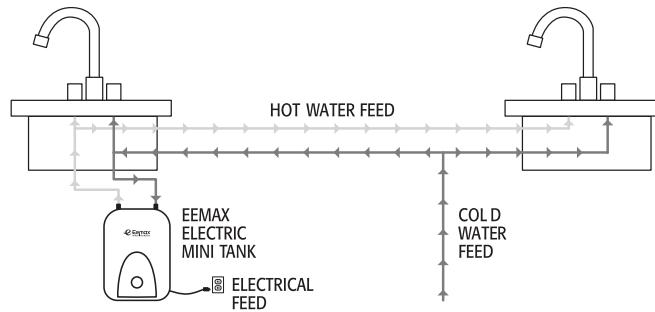

Point-of-Use Booster Heating Application from Central Tank Heating System

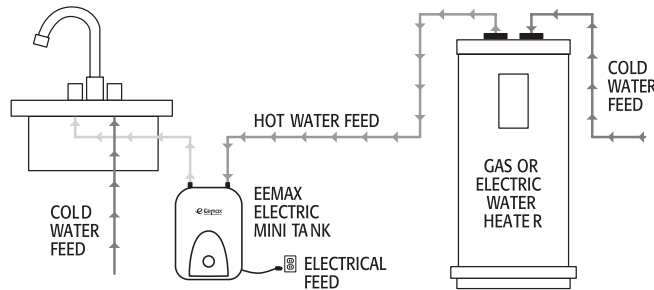

Cure for "Cold Water Sandwich" Gas Tankless Heating Application

