


Water Line Kits for Wall Mount Faucets

ROYAL SERIES

Model	Description
21-193L	3/8" E-Z Install Traditional Flexible Water Line Kit, 24" Long with Mounting Hardware

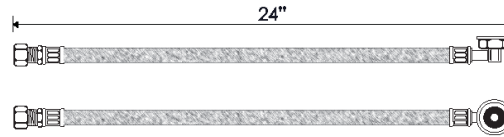


Standard Features

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes (2) 1/2" x 1/2" NPS Close Elbows, (2) 1/2" NPS Nipples, (2) washers, (2) locknuts
- 1/2" Compression fittings on faucet side and 3/8" Swivel Compression fittings on water supply side
- No soldering or teflon tape required

Specifications

Length	24"L
Diameter	3/8"
Pressure	20-125 PSI
Temp. Range	40°F to 180°F

Model	Description
21-443L	3/8" E-Z Install Flexible Water Line Kit, 22" Long

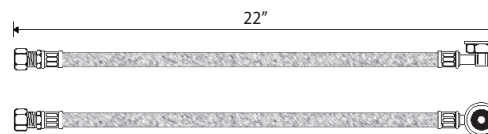


Standard Features

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes 1/2" NPS Close Elbows with Swivel Compression fittings on faucet side & 3/8" Swivel Compression fittings on water supply side
- No soldering or teflon tape required

Specifications

Length	22"L
Diameter	3/8"
Pressure	20-125 PSI
Temp. Range	40°F to 180°F

Model	Description
21-444L	1/2" High Volume E-Z Install Flexible Water Line Kit, 22" Long

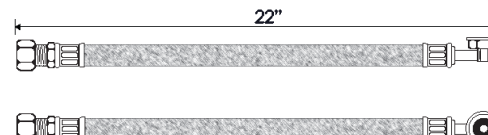


Standard Features

- (2) 1/2" stainless steel braided flexible supply Hoses
- Includes 1/2" NPS Close Elbows with Swivel Compression fittings on faucet side & 5/8" OD Compression fittings which are removable to convert to 1/2" NPS Male fittings on water supply side
- No soldering or teflon tape required on faucet side

Specifications

Length	22"L
Diameter	1/2"
Pressure	20-125 PSI
Temp. Range	40°F to 180°F

Model	Description
21-445L	3/8" E-Z Install Flexible Water Line Kit, 30" Long with Mounting Hardware

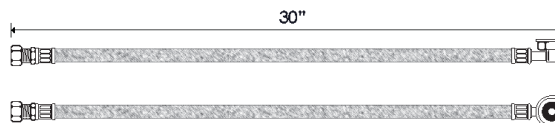

Standard Features

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes 1/2" NPS Close Elbows with Swivel Compression fittings on faucet side & 3/8" Swivel Compression fittings on water supply side
- (2) 1/2" NPS Nipples, (2) washers, (2) locknuts
- No soldering or teflon tape required

Specifications

Length	30"L
Diameter	3/8"
Pressure	20-125 PSI
Temp. Range	40°F to 180°F

Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes



California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information