

Model:	Item #:	Date:
Duningto	04	Annuaried Dir.

Electronic Sensor Faucet Single Hole Wall Mount

ROYAL SERIES




Model	Description		
16-190	Electronic Sensor Faucet Single Hole Wall Mount with 4-1/2" Wide Gooseneck Spout		
16-191	Electronic Sensor Faucet Single Hole Wall Mount with 6" Wide Gooseneck Spout		

Product Compliance

- NSF/ANSI/CAN 61 Q<1
- NSF/ANSI/CAN 372-2022
- ASME A112.18.1/CSA B125.1
- UL1951, CAN/CSA C22.2 No. 68, CAN/CSA C22.2 No. 14
- Massachusettes Approved
- CEC Approved
- Meets ANSI A117.1 (ADA)

9-3/4



(NSE)

Warning

2-3/16"


Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

Standard Features

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Built-in filter to prevent debris from entering solenoid valve
- Low battery indicator light
- Battery life 1-3 years based on usage

Specifications

Water Inlet	3/8" NPS Male
Temp. Range	40°F - 180°F
Water Pressure	20-120 PSI
Sensor Type	Infrared
Flow Rate	2.2 GPM
Default Time Out	30 Seconds
Default GPC	1.10
Default Shut-Off Delay	1 Second
Default Auto Flush	Off
Sensor Range	3/4"- 8-1/4"
Battery Life	500,000 cycles
Material	Solid Brass
Finish	Polished Chrome
Weight	1.5 lbs.

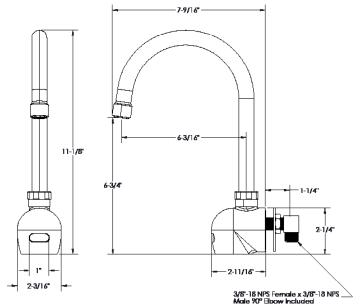

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.



Model:	Item #:	Date:
Project:	Qty:	Approved By:

Electronic Sensor Faucet Single Hole Wall Mount


ROYAL SERIES

Flow Control	Setting				
Shut-Off Delay	1s	10	Os		15s
Auto Flush	ON		OFF		
Auto Timo Out	150 200 250	300	150	1m	2m 10m

Auto Time Out 15s 20s 25s 30s 45s 1m 2m 10m

Default Flow Control Setting Highlighted in Gray

No.	Replacement Parts	Model
1	Flat Sensor with Cable	16-505
2	Spout Supply Hose	16-512
3	Control Module	16-198
4	Mechanical Mixing Valve	16-402L
5	Water Supply Hoses	16-510
6	Optional AC Adapter	16-199

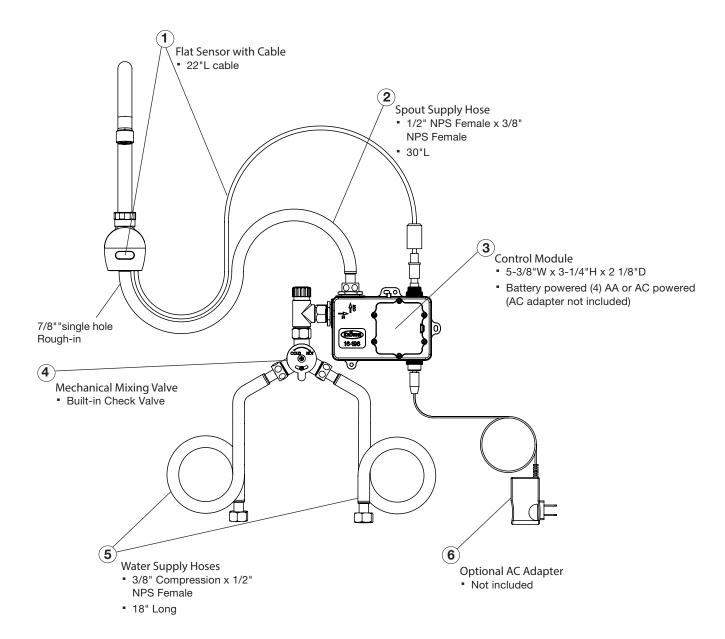

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.