

12"W Hand Sink with 4" Center Electronic Sensor Faucet




Hand Sinks



Model	Description
HS-64	12"W Hand Sink with 4" Center Electronic Sensor Faucet
HS-65	12"W Hand Sink with 4" Center Electronic Sensor Faucet and Right and Left Side Splashes

Product Compliance

- NSF-2
- ASME A112.19.3/CSA B45.4
- Massachusetts Listed

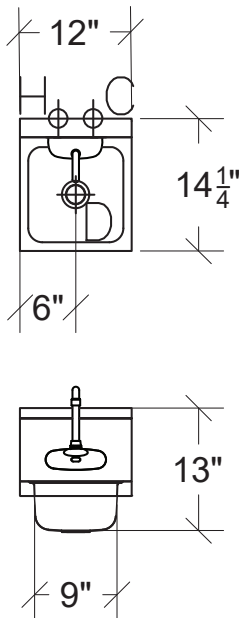

Hand Sink Specifications

Overall Size	12"W x 14-1/4"D x 13"H
Bowl	9"W x 9"D x 5" deep drawn bowl with stamped rim to prevent spillage
Faucet	4" center wall mount electronic sensor faucet (16-670)
Drain	1-1/2" stainless steel drain
Side Splashes	Right and Left, 7-3/4"H
	1/2" IPS hot and cold water
	1-1/2" IPS drain outlet
Plumbing	Install at 36" working height
	1/2" faucet supply 12" from floor
	1-1/2" drain line 23-1/4" from floor
Fabrication	20 gauge stainless steel
Wall Mount Bracket	Offset design for added strength
Weight	12 lbs. (HS-64)
	15 lbs. (HS-65)

Faucet Specifications

Model	16-670
Water Inlet	3/8" Compression
Temp. Range	40°F - 180°F
Water Pressure	20-120 PSI
Sensor Type	Infrared
Flow Rate	2.2 GPM
Default Time Out	30 seconds
Default GPC	1.10
Default Shut-Off Delay	1 second
Default Auto Flush	Off
Sensor Range	3/4" - 8-1/4"
Power Source	(4) AA batteries included
Battery Life	500,000 cycles
Material	Nickel Plated Brass



Faucet includes Control Module, Mechanical Mixing Valve, & Supply Hoses. AC Adapter is optional (16-199).

Optional

AC Adapter
16-199



Warning:

Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.