

# Self-Contained Back Bar Refrigeration

# ROYAL SERIES



BS60L-KSS-LR

## Standard Features

- 35" High without Top, 36" High with 1" Optional Top
- 24" Front to Back Depth (25" with Top)
- Coved corner stainless steel interior
- Heavy duty Self-Closing 24"W Doors
- Stainless steel door handles with built-in locks
- Digital thermostat
- Built-in Cool White LED Lighting (7000K)
- DynamicChill 360° Technology
- Heated mullion to minimize condensation
- Approved for NSF 7 Open Food Storage
- Pre-drilled bottom for optional legs or casters (uses 1/4-20 self tapping 1/2"L screw)
- Eco-friendly Refrigerant and Insulation
- 5-Year Compressor Warranty
- 2-Year Parts & Labor Warranty

Base Model	Length	Doors	Amps	Bottle Capacity	HP	Weight
BS36	36"	1	1.7	165	1/5	285 lbs.
BS60	60"	2	2.2	375	1/4	360 lbs.
BS84	84"	3	2.7	600	1/3	480 lbs.
BS108	108"	4	2.8	720	1/3	525 lbs.

## Case Capacity

Base Model	Long Neck Bottles	12 oz. Cans	Wine Bottles
BS36	7.5	10	72
BS60	15.5	20	162
BS84	24	34	248
BS108	30	40	288

### DUAL ZONE TEMPERATURE CONTROL\*

Model	Description
RB-STAT	Red Wine, 60°F - 65°F and Beer, 30°F - 40°F
RW-STAT	Red Wine, 60°F - 65°F and White Wine, 50°F - 55°F
WB-STAT	White Wine, 45°F - 50°F and Beer, 34°F - 40°F

\*Only available on 60", 84", and 108" units

## Specifications

<b>Electrical</b>	115V, 1 Phase, 60 Hz Furnished with 8' plug-in cord, which exists left or right rear of cooler NEMA 5-15P plug configuration Dedicated 15 Amp circuit recommended
<b>Refrigeration</b>	R290 Hydrocarbon Refrigerant 30°F - 40°F operating range Digital thermostat on front grille
<b>Plumbing</b>	No drain required Condensate evaporator pan included
<b>Insulation</b>	2" thick foamed-in-place polyurethane
<b>Interior</b>	20 gauge stainless steel walls with coved corners NSF epoxy coated durable shelves - one bottom and two adjustable shelves per door
<b>Exterior</b>	Sides: 20 gauge stainless steel Front: 20 gauge stainless steel Top: 20 gauge stainless steel with option of 1" top
<b>Doors</b>	Self-closing 24"W doors available in black vinyl, stainless steel, glass with black vinyl, or glass with stainless steel 19-3/4"W x 29-11/16"H door opening

This equipment is intended for the storage and display of non-potentially hazardous bottle or canned products only.

This equipment is intended for use in an area where the ambient temperature typically does not exceed 75 °F.

Krowne • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • F: (973) 872-1129 • support@krowne.com • krowne.com

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Rev 0 • 3/2026 • No. 1.3 Self-Contained BB Refrigeration




## Self-Contained Back Bar Refrigeration

## ROYAL SERIES


### One Door (36")

Models beginning BS36

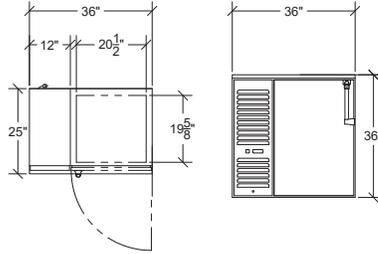


### Standard Door Side View

Applies to all Models

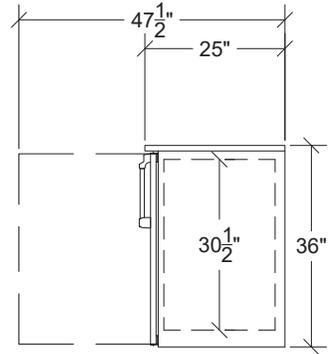


### Two Door (60")

Models beginning BS60

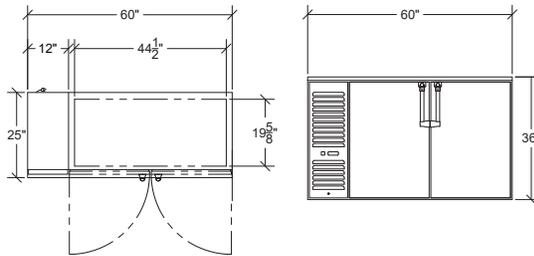


### Three Door (84")

Models beginning BS84

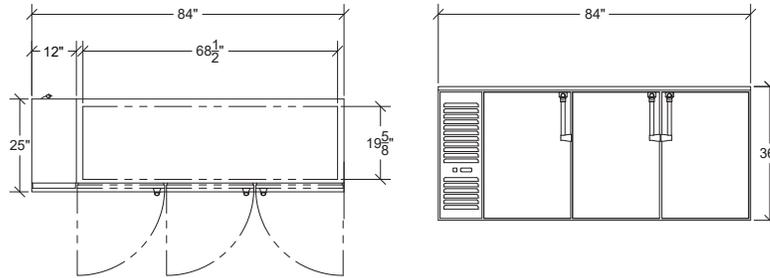

### Four Door (108")

Models beginning BS108

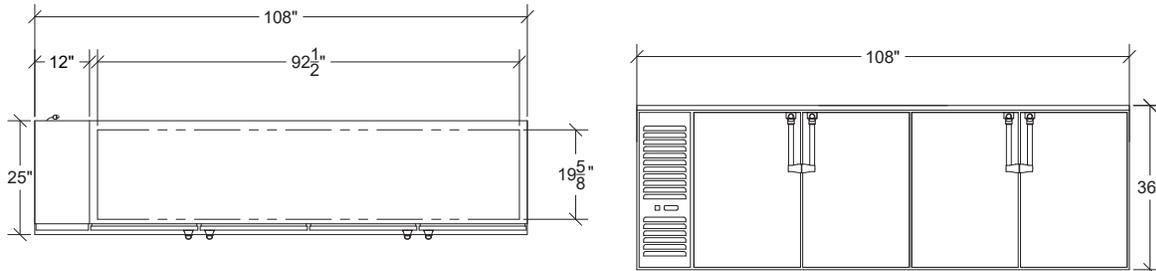

**Note:** Optional casters raise height 1" higher than wheel size

**Note:** Optional 4" or 6" legs available

