

Krowne Air Cooled Undercounter 2" x 2" Ice Cube Machine ROYAL SERIES



Standard Features

- Compact footprint fits easily beneath underbar counters
- Clear solid 1.9" x 1.9" x 2.3" ice cubes
- Built-in storage bin, 22 lb. capacity
- Durable stainless steel exterior
- Removable air filter for maintenance
- Ice scoop included
- 6" leg height
- Closed water circuit for contamination protection
- Foam injected polyurethane (PU) insulation
- 3-year parts & labor warranty (Entire Machine)
- 5-year parts warrant (Compressor & Condenser Coil)

Specifications

Model	Length	Depth	Height	Ice Prod. (lbs/24hrs)	Amps	Weight
KR-IC19	19-3/4"	17-3/4"	39-1/2"	50	5.0A	115 lbs.

Electrical	115V, 1 Phase, 60 Hz.
	6.5' power cord, NEMA-5-15P plug configuration Dedicated 15A circuit / 5.0A amperage
Ice Production	Up to 50 lbs. per 24 hrs. (70°/50°F) 45 lbs. per 24 hrs. (90°/70°F) R134a refrigerant, 6.0 oz. charge
Water Usage	Potable: 22 gal. per 24 hrs. (90°/70°F) 15.7 kWh per 100 lbs. of ice (90°/70°F)
Plumbing	Water supply: min. 1/2" nominal ID copper tubing Drain: min. 3/4" nominal ID hard pipe
Operating Limits	Ambient: 45–100°F ; Water: 45–90°F Water pressure: 10–113 PSIG
Insulation	Foam injected polyurethane, HFC free
Exterior	Durable stainless steel



This equipment is intended for the storage and display of non-potentially hazardous bottle or canned products only.

This equipment is intended for use in an area where the ambient temperature typically does not exceed 75 °F.

Krowne • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • F: (973) 872-1129 • support@krowne.com • krowne.com


Due to our commitment to continued product improvement, specifications are subject to change without notice.




Rev 0 • 07/2026 • KR-IC19

Krowne Air Cooled Undercounter 2" x 2" Ice Cube Machine ROYAL SERIES

Front View

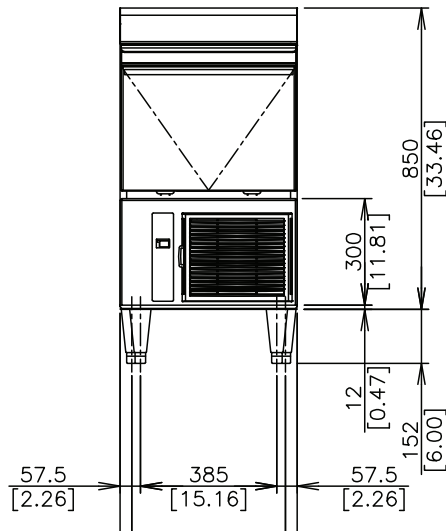


Rear View

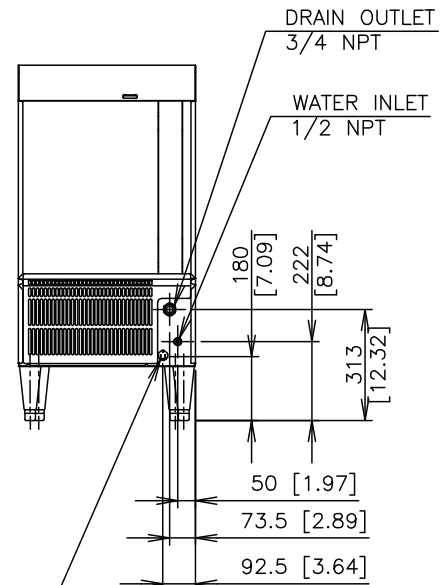

POWER SUPPLY CORD 2.0m[6.56 ft] LONG

Side View

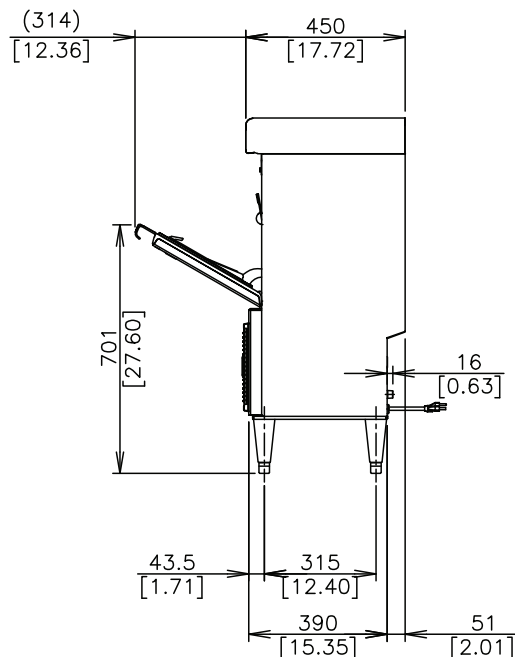

Top View

